

Mod-SM-Corner-24D - Specification Sheet

Features

- Dimmable LED task lighting
- Energy efficient LED lighting 5000K
- 6360 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- Single phase wire installation, silver backed, copper free
- Construction for surface mounting
- Includes installation hardware

Codes/Standards Applicable

- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

Mod2436L:


- 120Vac, 60Hz, 49W
- Electric Current: 0.40A
- Wattage: 49W

Mod2436R:

- 120Vac, 60Hz, 49W
- Electric Current: 0.40A
- Wattage: 49W

Model

- Mod-SM-Corner-24D
- Combo of:
MODULAR 2436 Left LED Mirror
MODULAR 2436 Right LED Mirror

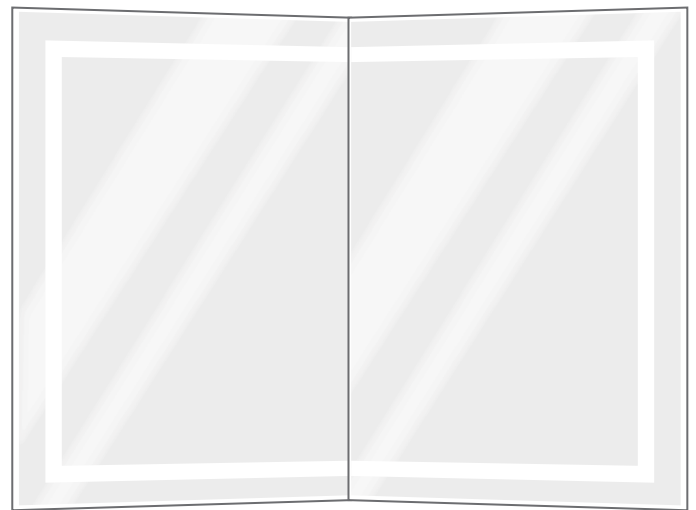

Mod-SM-Corner-24D - Specification Sheet


Dimensions

Mod2436L:

- Height: 36"
- Width: 24"
- Depth: 1-9/16"

Mod2436R:

- Height: 36"
- Width: 24"
- Depth: 1-9/16"

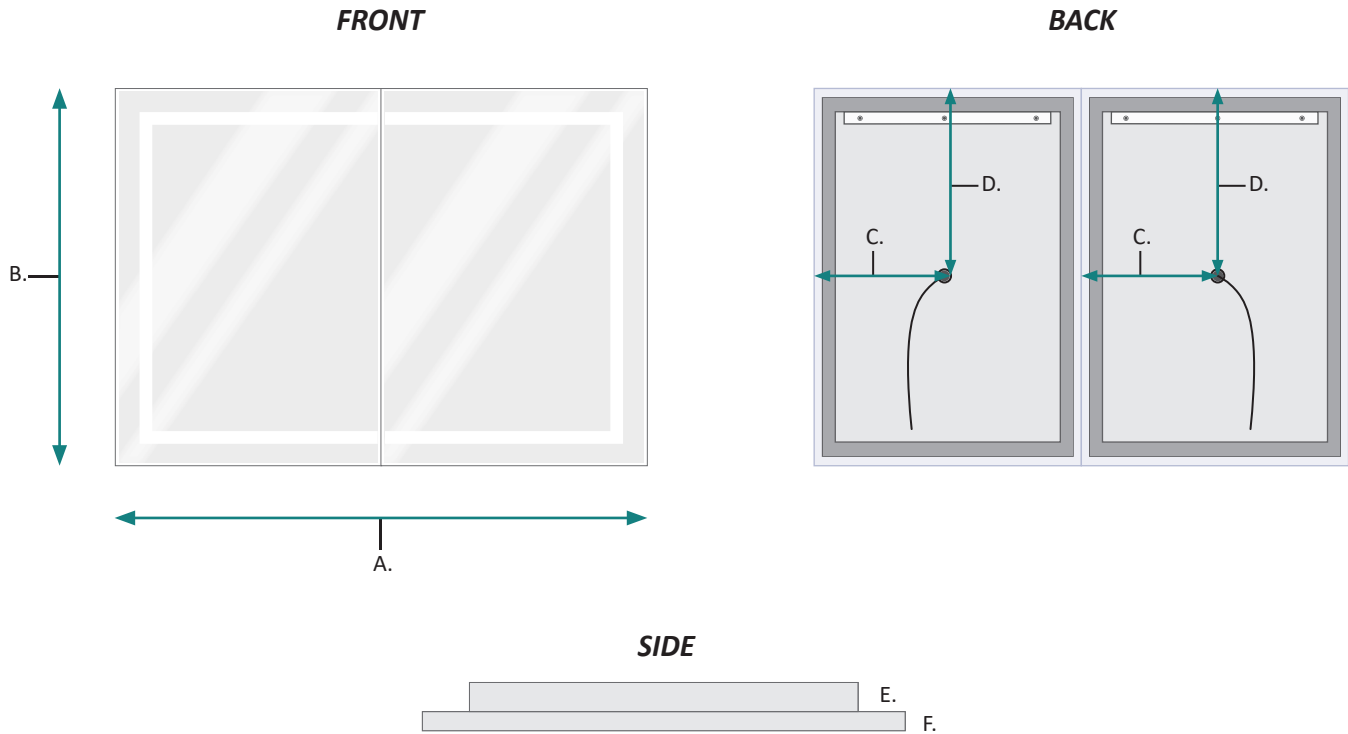

FRONT, BACK & SIDE

MODEL	A	B	C	D	E	F
Mod-SM-Corner-24D	48	36	9-5/8	17-7/8	1-3/8	3/16