# NEWP<del>O</del>RT BRASS.

**Features** 

• IPC

• 26:

## **MIRO**

#### **Thermostatic Shower System Trim** Solid brass construction 3-1624TR • Temperature-adjust handle for thermostatic valve • Lever handle assembly for control valve • Intended for use with Newport Brass rough valve(s) as specified (Required Accessory) ADA Compliant Also 3-279L Codes / Standards Compliance Meets or exceeds the following at date of manufacture: • ASME A112.18.1/CSA B125.1-18 • IAMPO/cUPC • ADA & ICC/ANSI A117.1 • All applicable US Federal and State material regulations **Colors / Finishes** • 10B: Oil Rubbed Bronze • 15: Polished Nickel • 15S: Satin Nickel - PVD Polished Chrome • Other: Refer to the Newport Brass catalog for additional color/finish options. 3-1624TR 3-279L **Specified Model** . . .

Model	Description	Colors   Finishes
3-1624TR	Thermostatic Shower System Trim	□ 10B □ 15 □ 15S □ 26 □ Other
3-279L	Shower System Control Valve Trim (Escutcheon/Handle)	□ 10B □ 15 □ 15S □ 26 □ Other

### **Required Accessory**

					and the second
System Element	Shower Temp. Control	Flow Control Valve Option A		Flow Control Valve Option B***	
Description	Thermostatic	3-Outlet Diverter w/OFF		Single Outlet ON/OFF	
Inlet/Outlet Size	3/4″	1/2" (no share function)	1/2" (w/share function)	1/2″	3/4″
Part Number	1-540	1-701*	1-702**	1-606U	1-607U
Image					

Flow Control Option A: Select ONE (1-701 or 1-702) per system.

\* 1-701 is a diverter valve with NO share function capability between outlets.

\*\* 1-702 is a diverter valve with share function capability between primary outlet and each of the other two outlets.


Flow Control Option B: Select ONE (1-606U or 1-607U) per each outlet fixture (ie showerhead, handshower, overhead soaker).

### Product Specification Add "Color / Finish" suffix to Model number, below.

The Thermostatic Shower System Trim shall be made of solid brass construction. Thermostatic Shower System Trim shall include a faceplate and temperature-adjust handle. Shower System Control Valve Trim(s) (Escutcheon/Handle) shall be ADA compliant when used with specified Shower System Control Valve(s). Thermostatic Shower System Trim shall be Newport Brass Model 3-1624TR/\_\_\_ \_ and Thermostatic Shower System Valve shall be Newport Brass Model 1-540. Shower System Control Valve Trim (Handle/Escutcheon) shall be 3-279L/\_\_ and Shower System Control Valve(s) shall be 1-70\_\_\_\_ (1 required) or 1-60\_\_\_\_(one required per outlet fixture).

## 3-1624TR

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

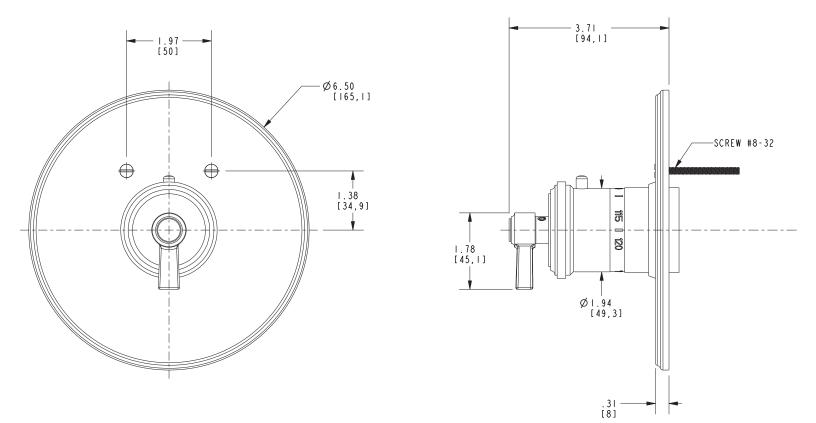

NOTE: Product Dimensions for the Shower System Control Valve Handle Trim (Handle/Escutcheon can be found within the Spec Sheet for that specific part number.

### Miro Thermostatic Shower System Trim **3-1624TR**



Page 2 of 2 Spec\_3-1624TR\_a\_11.20 EN-3961-2

t: 949.417.5207 | www.newportbrass.com ©2020 Brasstech, Inc.