

**Features**

- Over 28 finishes including 13 PVD finishes
- All brass construction
- Insulated body & spout to reduce heat to faucet
- Self-closing for hot water
- Max flow rate: 0.5 gpm (1.9 L/min); may vary based on hot water tank used
- Requires Hot Water Tank (9628SS); sold separately
- Faucet is **not** compatible with RO filter units

**9623-K51-XX**



(9623-K51-ST shown)



XX = DENOTES HANDLE SHOWN

**Codes/Standards Applicable**




Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- NSF 61 and NSF 372
- CEC & DOE
- Commonwealth of MA
- ADA compliant

**THROUGH-HOLE SPECIFICATIONS**

MIN	RECOMMENDED	MAX
Ø1-1/4" [32mm]	Ø1-3/8" [35mm]	Ø1-5/8" [41mm]

DIMENSIONS		
XX HANDLE	A	B
FB	4 13/16" [122mm]	1 15/16" [49mm]
ST	4 3/4" [121mm]	2" [51mm]
BFB	4 13/16" [122mm]	1 15/16" [49mm]
BST	4 3/4" [121mm]	2" [51mm]

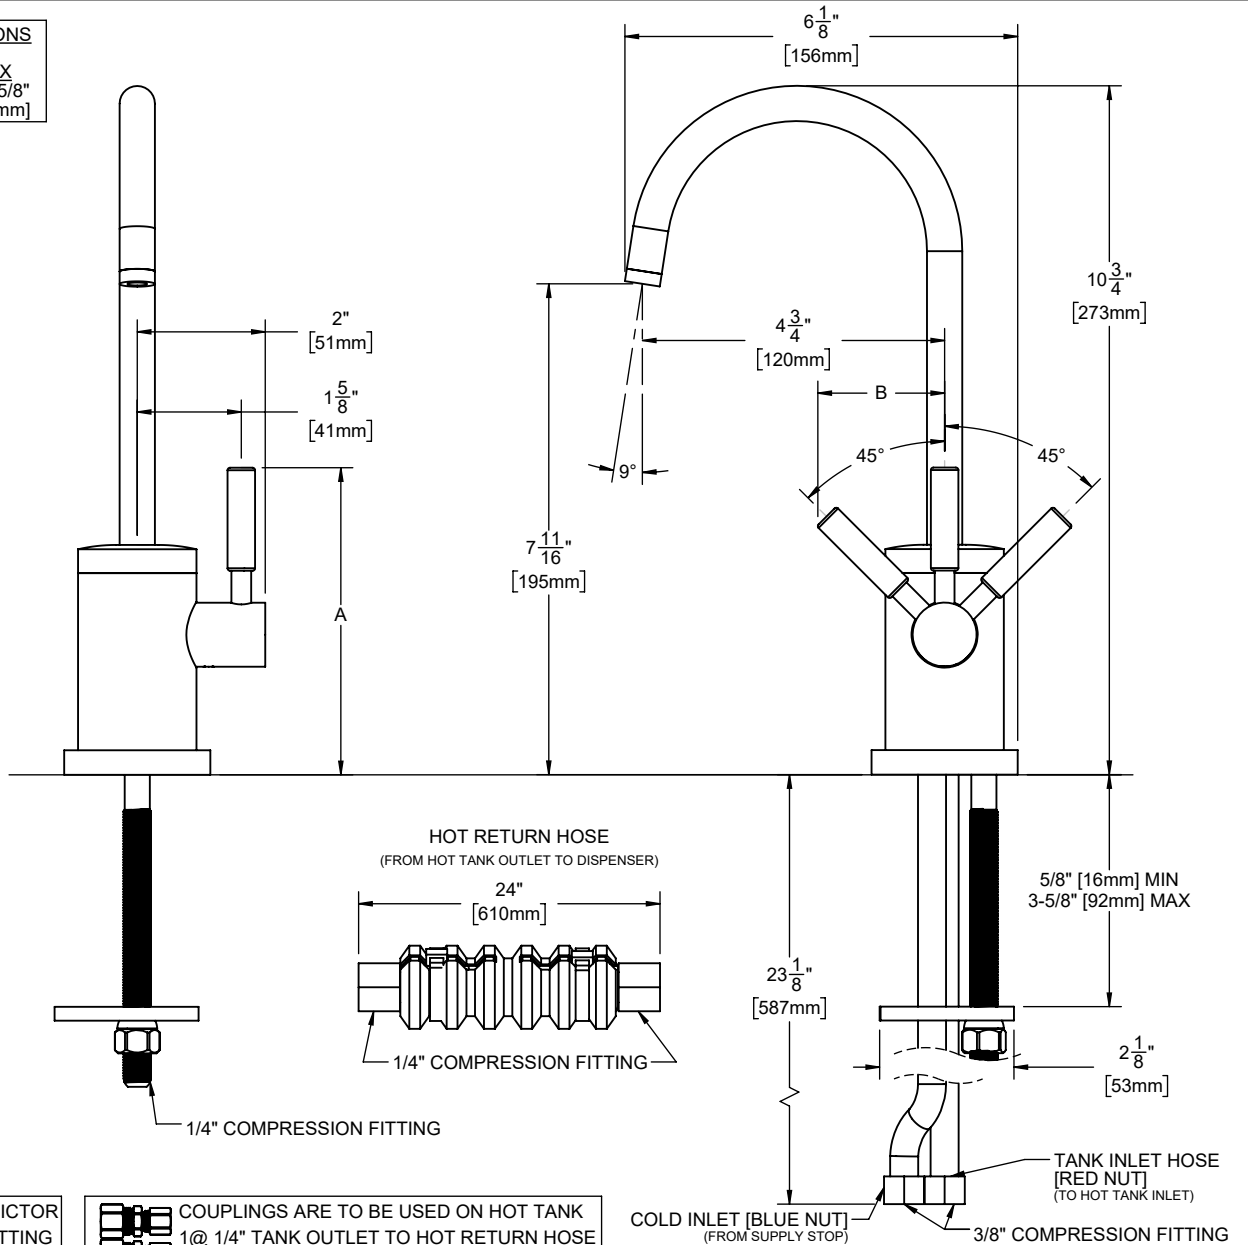

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"  
[ALL DIMENSIONS SHOWN TO NEAREST 1mm]