

## <u>KITCHEN</u>

## CONTEMPORARY HOT ONLY WATER DISPENSER

## **Features**

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 180° rotating spout
- Insulated body and spout to reduce heat transfer to faucet
- Self-closing handle
- Max flow rate: 1.8 gpm (6.8 L /min); varies with hot water tank
- Faucet is not compatible with RO filter unit
- Requires Hot Water Tank (9628SS) sold separately

## **Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61 and NSF 372
- CEC/DOE
- · Commonwealth of MA
- ADA compliant




9625-K51-ST shown

9625-K51-BFB 9625-K51-BST 9625-K51-FB 9625-K51-ST



XX = DENOTES HANDLE SHOWN

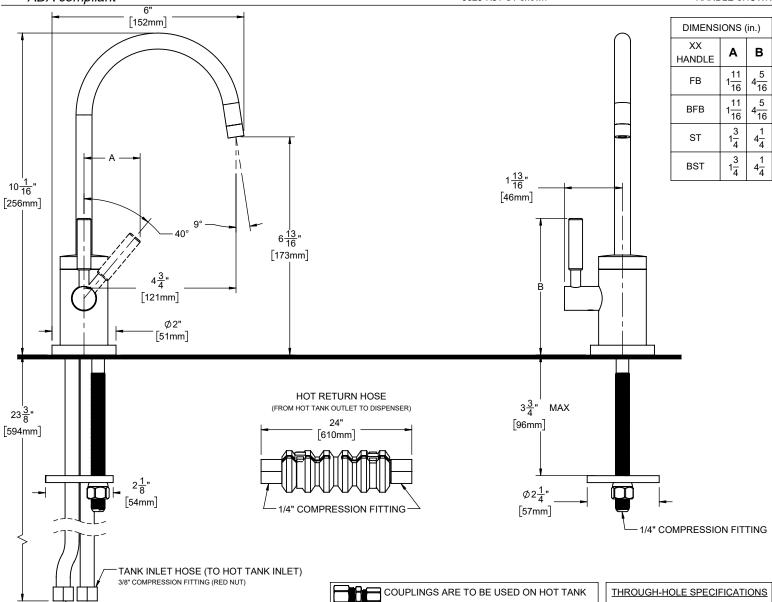

COLD INLET HOSE (TO HOT TANK INLET)

RECOMMENDED

Ø 1-3/8"

Ø 1-1/2"

MIN

Ø1-1/4"

1 @ 1/4" TANK OUTLET TO HOT RETURN HOSE

1 @ 3/8" TANK INLET TO TANK INLET HOSE