

<u>Solimar</u>

WIDESPREAD LAVATORY FAUCET

Features

- 5-1/2" spout center to center 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- ∅ 1-1/4" all brass touch style pop up drain assembly
- 1.2 gpm (4.5 L/min) max flow rate
- All brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1 NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA
- ADA compliant











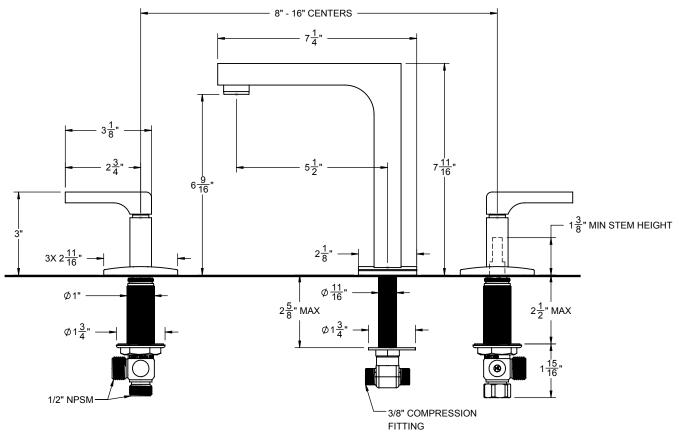





THROUGH-HOLE SPECIFICATIONS <u>MIN</u> **RECOMMENDED** <u>MAX</u> SPOUT: Ø1-1/8" VALVE: Ø1" Ø 1-3/8" Ø 1-1/2"

ALL DIMENSIONS SHOWN TO NEAREST 1/16"