



California Faucets®

Descanso™

WALL LAVATORY

Features

- Over 28 finishes including 13 PVD finishes
- All brass construction
- 1.2 gpm (4.5 L/min) max flow rate
- Rough valve (CF-VL-R) sold separately

Codes/Standards


Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC & DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory



CF-TO-V3002XK-9 shown

CF-TO-V3002X-7/9
CF-TO-V3002XK-7/9
CF-TO-V3002XF-7/9

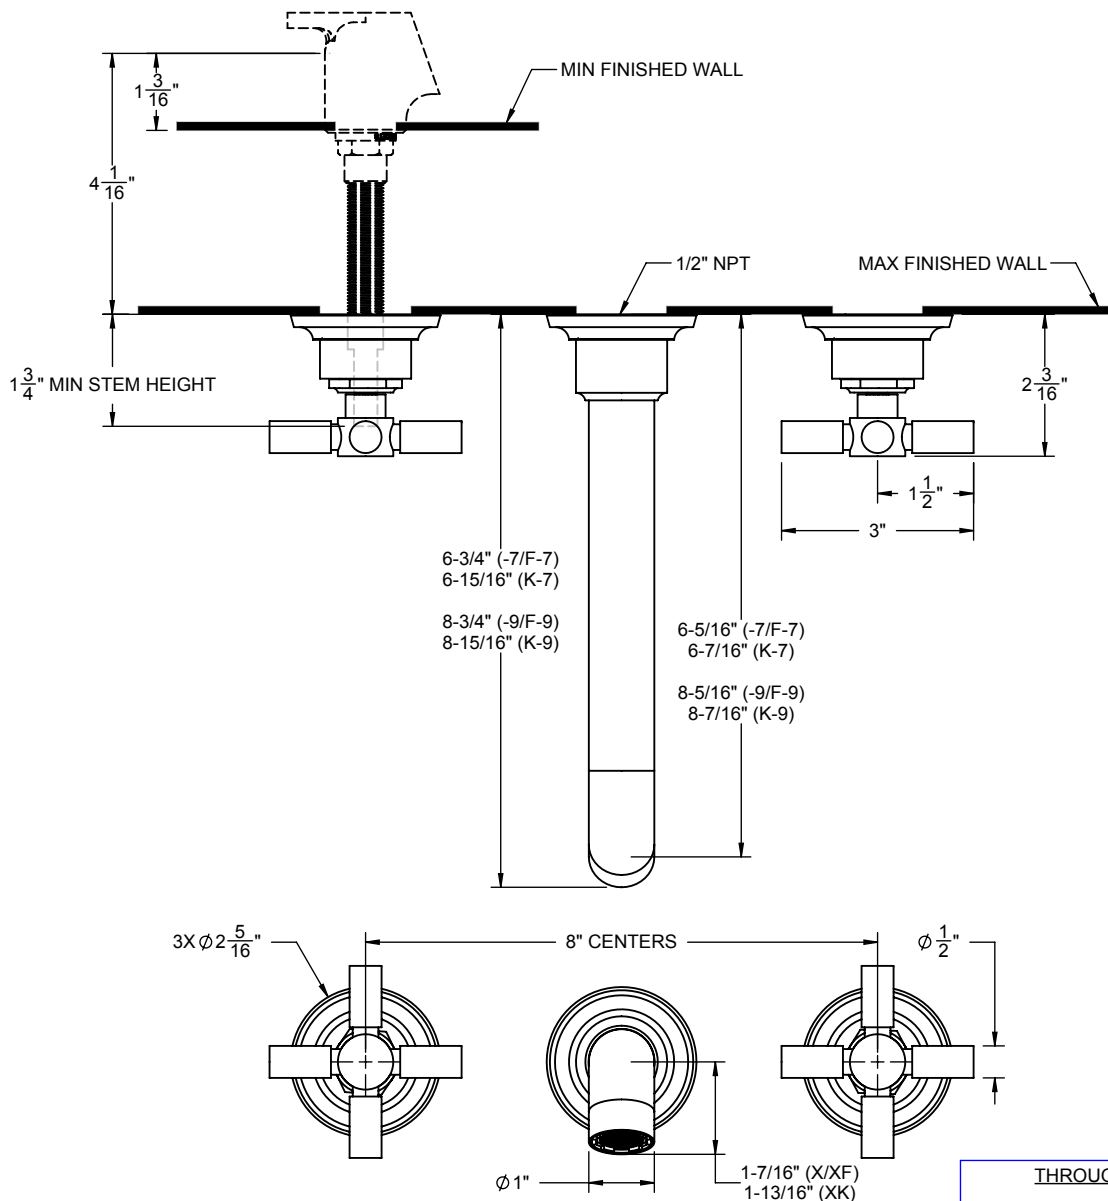

THROUGH-HOLE SPECIFICATIONS

	MIN	RECOMMENDED	MAX
SPOUT: Ø 1"	Ø 1-1/4"	Ø 1-15/16"	Ø 1-15/16"
VALVE: Ø 1-1/4"	Ø 1-1/4"	Ø 1-15/16"	Ø 1-15/16"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"