




WALL LAVATORY


Features

- 8" spout wall to center
- 1.2 gpm (4.5 L/min) max flow rate Rough Valve (CF-VL-R)) sold separately
- All brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards Applicable

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- EPA WaterSense High Efficiency Lavatory
- Commonwealth of MA
- ADA compliant

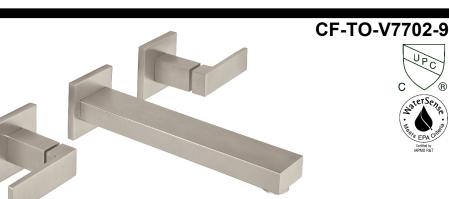

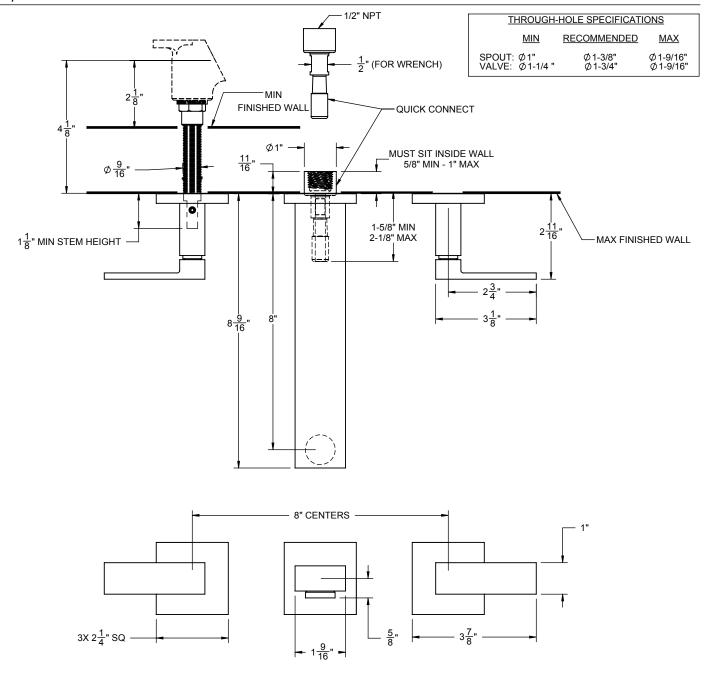

ALL DIMENSIONS SHOWN TO NEAREST 1/16"