

WALL OR DECK HANDLE TRIM


**TO-45X-W** 

## **Features**

Base diameter 2-5/16"

Use for wall stop, wall diverter, or deck diverter


- Rough valve sold separately (50-W-R, 75-W-R, WDV-R, DDV-R)
- Solid brass construction
- Over 30 finishes including 15 PVD finishes




## Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1



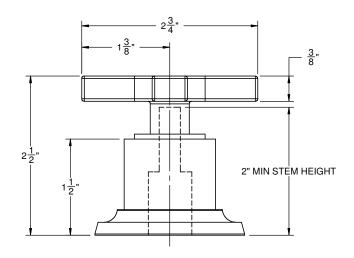

THROUGH-HOLE SPECIFICATIONS MIN RECOMMENDED MAX

VALVE: Ø11/16"

Ø1-1/4

Ø1-5/8"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE