




TO-C103XL


Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Less head, arm, flange, and spout
- Requires rough-in (3-VR) sold separately

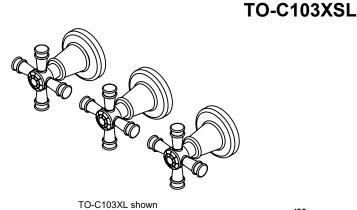

Codes/Standards

Product meets or exceeds the following: • ASME A112.18.1/CSA B125.1

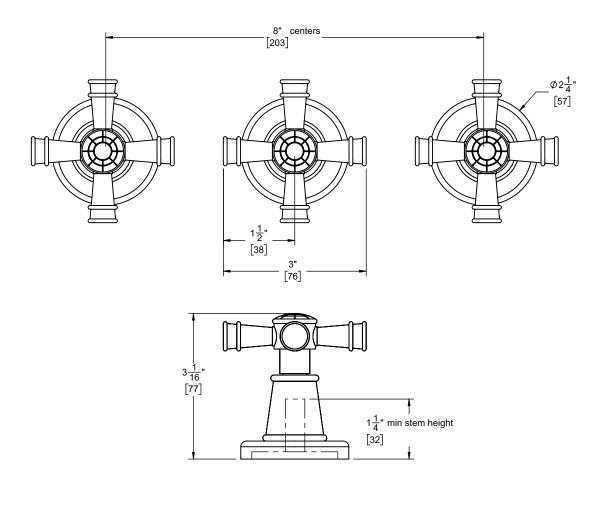

 Min
 Recommended
 Max

 Valve:
 \$\phi\$-1/8" [24]
 \$\phi\$-1/8" [32]
 \$\phi\$-1/5/8" [41]

 Diverter:
 \$\phi\$-1/2" [38]
 \$\phi\$-1/2" [38]
 \$\phi\$-1/2" [38]
 \$\phi\$-1/2" [41]

 Dimensions are inches, rounded to 1/16"
 [Dimensions in brackets are mm, rounded to 1mm]
 1

TO-C103XL sp 210727

RV tam approving

Specifications subject to change without notice