



TO-C106XL

TO-C106XSL


ES PMG

Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Less head, arm, flange, and spout
- Requires rough-in (2-VR) sold separately

Codes/Standards

Product meets or exceeds the following:ASME A112.18.1/CSA B125.1

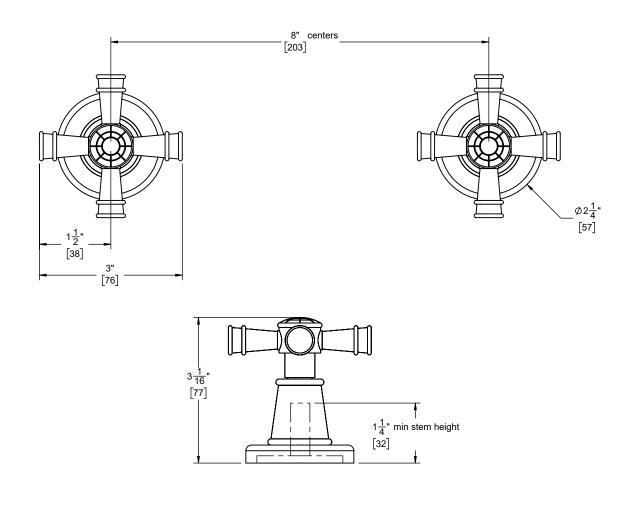

TO-C106XL shown

	Through-Hole Specifications			
		Min	Recommended	Max
	Valve:	Ø1-1/8" [24]	Ø1-3/8" [32]	Ø1-5/8" [41]
Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]				
TO-C106XL_sp_210727				

RV tan approving

Specifications subject to change without notice