


TO-C2-W

**Features** 

· Available in 28 finishes including 13 PVD finishes


- · All brass construction
- · Use for wall stop, wall diverter, or deck diverter
- Rough valve (50-W-R, 75-W-R, WDV-R, DDV-R) sold separately




## Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ADA compliant



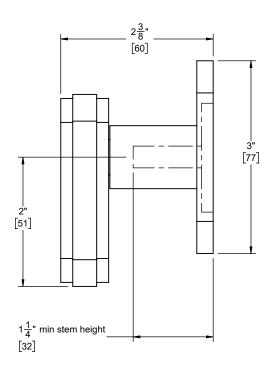

Through-Hole Specifications

 Min
 Recommended
 Max

 Valve:
 ∅ 11/16" [17]
 ∅ 1-1/4" [32]
 ∅ 1-5/8" [41]

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]