

- □ Model 2252 Recessed
- ☐ Model 2252-10 Semi-Recessed (recesses 3½"; projects 4")
- ☐ Model 2252-11 Surface-Mounted (projects 7½")
- Standard Series Satin Finish

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

FLANGE: 22 gauge stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with ¼" return.

DOORS: 18 gauge stainless steel. Warp resistant, with full length piano hinge and tumbler lock keyed like other Bradley units.

TOWEL DISPENSER: 22 gauge stainless steel. Rolled edge on dispenser

WASTE RECEPTACLE INSERT: leakproof molded plastic.

Capacity

Towel Dispenser — 1000 single-fold, 700 multi-fold or 400 C-fold paper towels. Waste Receptacle Insert — 4.9 gal. (.65 cu. ft.)

Operation

Towel dispenser holds single-fold, multi-fold or C-fold towels without use of special adaptor. Waste receptacle insert removable by unlocking receptacle door.


Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening $12\frac{1}{2}$ "W x $54\frac{1}{2}$ "H x $7\frac{1}{2}$ "D (Semi-recessed unit only $3\frac{1}{2}$ " deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required. Surface-mounted units must have holes drilled by installer.

Guide Specification

Recessed combination towel dispenser and waste receptacle shall be fabricated of 22 gauge stainless steel with exposed surfaces in satin finish. Doors of nonflexing construction, equipped with heavy duty piano hinges and locks. Towel dispenser capacity 1000 single-fold, 700 multi-fold or 400 C-fold towels. Removable 4.9 gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 14"W x 56"H x 7½"D.

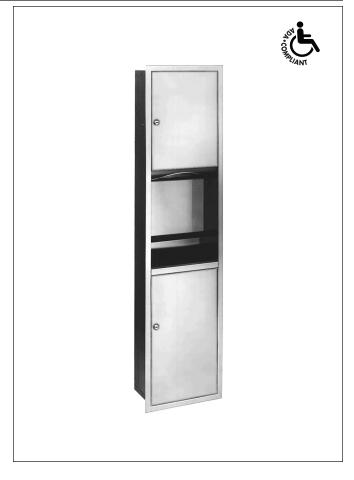

Optional Features


	Suffix	
	Self-closing push-flap door	-35

ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

Washroom Accessories Document No. 8090



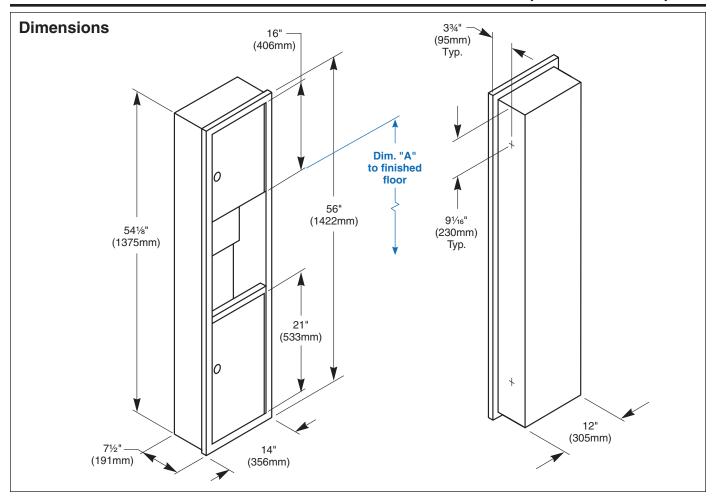

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening		
Paper towel top of	48" (1219mm)	64¼" (1632mm)	95%" (244mm)		
opening to finished floor	45" (1143mm)	61¼" (1556mm)	65%" (168mm)		
	42" (1067mm)	58¼" (1480mm)	3%" (92mm)		
	40" (1016mm)	56¼" (1429mm)	1%" (41mm)		
Rough wall opening:					
Surface Mount:	face Mount: No rough opening, see overall dimensions				
Recessed:	Recessed: 12½" (318mm) Wide x 545%" (1388mm) High x 7½" (191mm) Deep				
Semi-recessed: 12½" (318mm) Wide x 54%" (1388mm) High x 3½" (89mm) Deep					

Washroom Accessories Document No. 8090