

- \square Model 155 Recessed
- □ Model 155-10 Semi-Recessed (recesses 2"; projects 2")
- □ Model 155-11 Surface-Mounted (projects 4")

Product Materials

FLANGE: 22 gauge stainless steel with exposed surfaces in architectural satin finish. One-piece seamless construction, 1" wide with 1/4" return. **CABINET:** 26 gauge stainless steel.

DOOR: 22 gauge stainless steel with heavy-duty full-length piano hinge and tumbler lock keyed like other Bradley units.

MIRROR: first quality ¼" float glass triple-silvered, electro-copper plated with baked enamel backing, guaranteed for 15 years against silver spoilage. Protected by shock-absorbing filler.

EXTERIOR SHELF: 22 gauge stainless steel with an area of 60 sq. in.

Capacity

Towel Dispenser — 800 multi-fold or C-fold towels.

Operation

Towel dispenser holds multi-fold or C-fold towels.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15%"W x 29%"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification

Recessed multi-purpose unit consisting of mirror, towel dispenser, and shelf shall be fabricated of stainless steel with exposed surfaces in satin finish. Mirrored door with full-length piano hinge and tumbler lock. Towel dispenser capacity 800 multi-fold or 600 C-fold towels.

Overall dimensions: 171/8"W x 305/8"H x 4"D.



🔆 ADA Compliant


Consult local and national accessibility codes for proper installation guidelines.


Conformity and compliance to local and national codes is the responsibility of the installer.

Page 1 of 2 6/18/2014 This information is subject to change without notice. Bradley_MultiPurposeDispenser_155_10_11 © 2014 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com

155 Multi-Purpose Unit



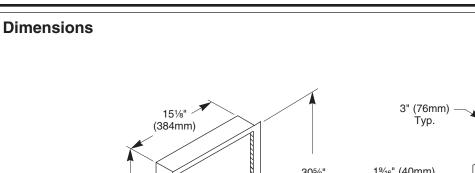

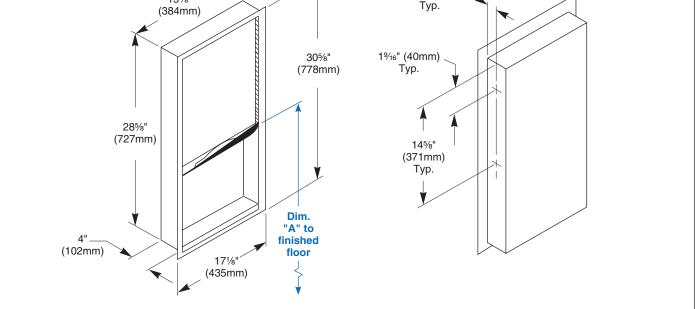

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Mirror's bottom edge of the reflecting surface to finished floor	48" (1219mm)	65¾" (1670mm)	36%" (930mm)
	45" (1143mm)	62¾" (1594mm)	335⁄₃" (854mm)
	42" (1067mm)	59¾" (1518mm)	305⁄8" (778mm)
	40" (1016mm)	57¾" (1467mm)	285⁄8" (727mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	15%" (397mm) Wide x 291⁄%" (740mm) High x 4" (102mm) Deep		
Semi-Recessed:	15%" (397mm) Wide x 291%" (740mm) High x 2" (51mm) Deep		

© 2014 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 0 BRADLEY (800 272 3539) +1 262 251 6000 800 BRADLEY (800 272 3539) bradleycorp.com