artos®

M06875H

denby towel warmer, hydronic







CHROME(CH)





POLISHED NICKEL(PN)







INSTALLATION GUIDE

OPERATING SPECIFICATIONS

denby towel warmer, hydronic



FEATURES

Towel warming, drying and auxiliary heating.

HEAT OUTPUT 1720 BTU

CODES

UL Approved CSA-US Approved


REQUIREMENTS

Towel warmers must be used in a closed water system, incorporating a rust inhibitor.

artos®


M06875H

denby towel warmer, hydronic

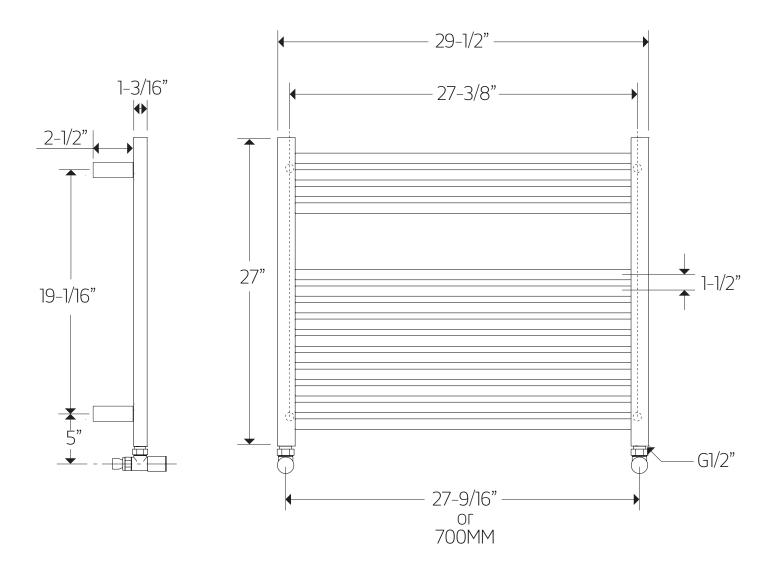


PRODUCT DIMENSIONS

denby towel warmer, hydronic

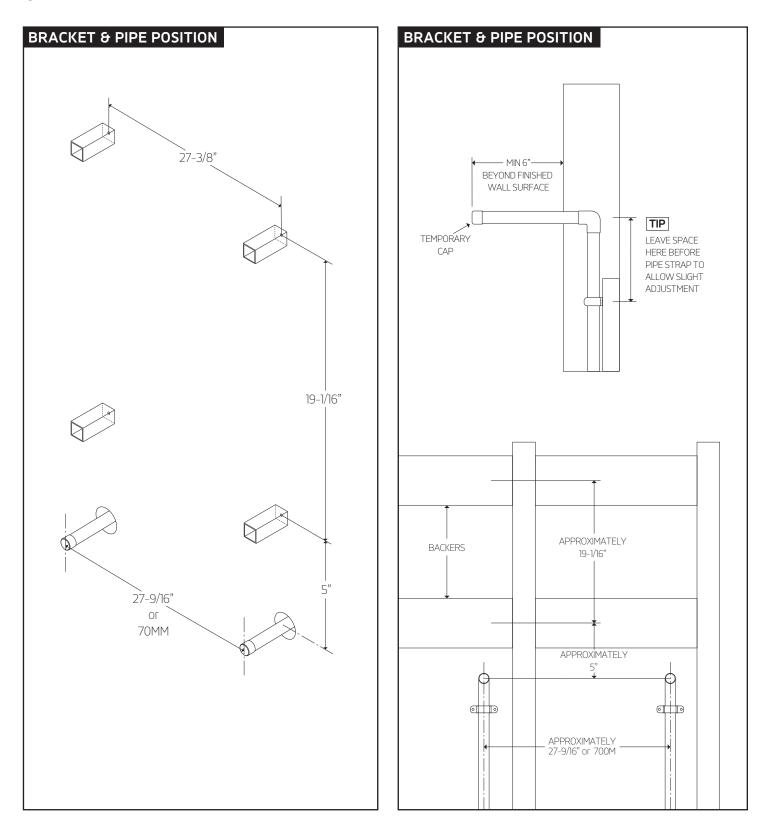

INSTALLATION STEPS

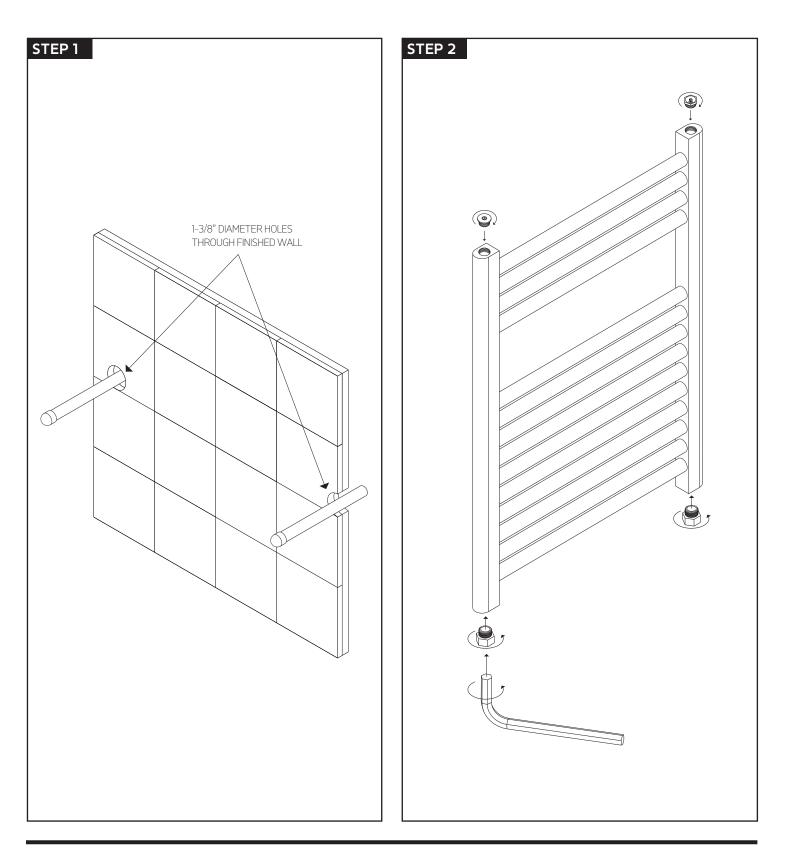


WESTOVER, INC


13305 B STREET OMAHA, NEBRASKA 68144

WWW.ARTOS.US.COM T:877.927.8679

denby towel warmer, hydronic

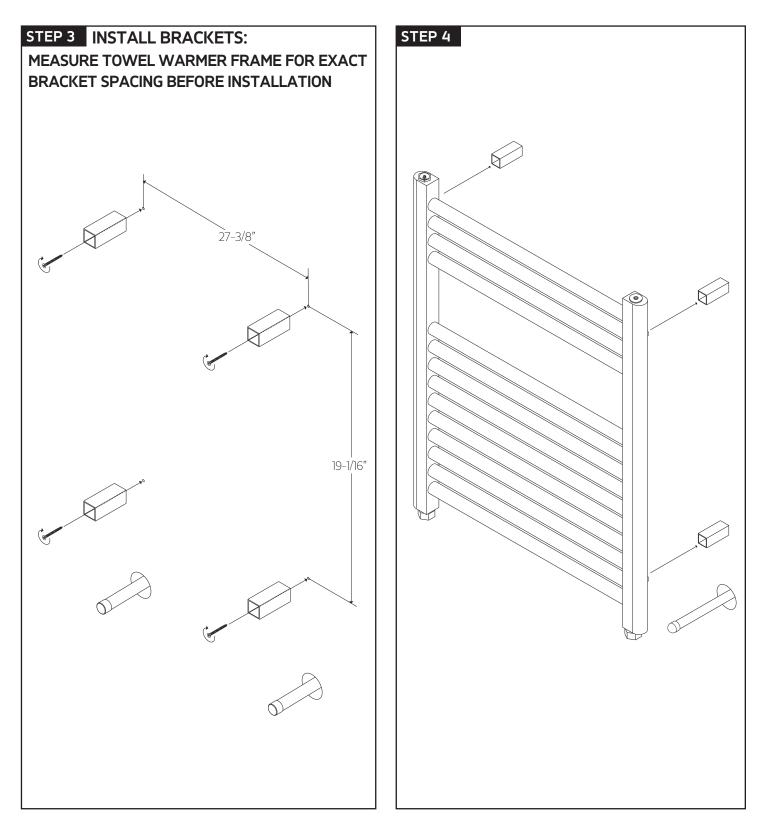

INSTALLATION STEPS

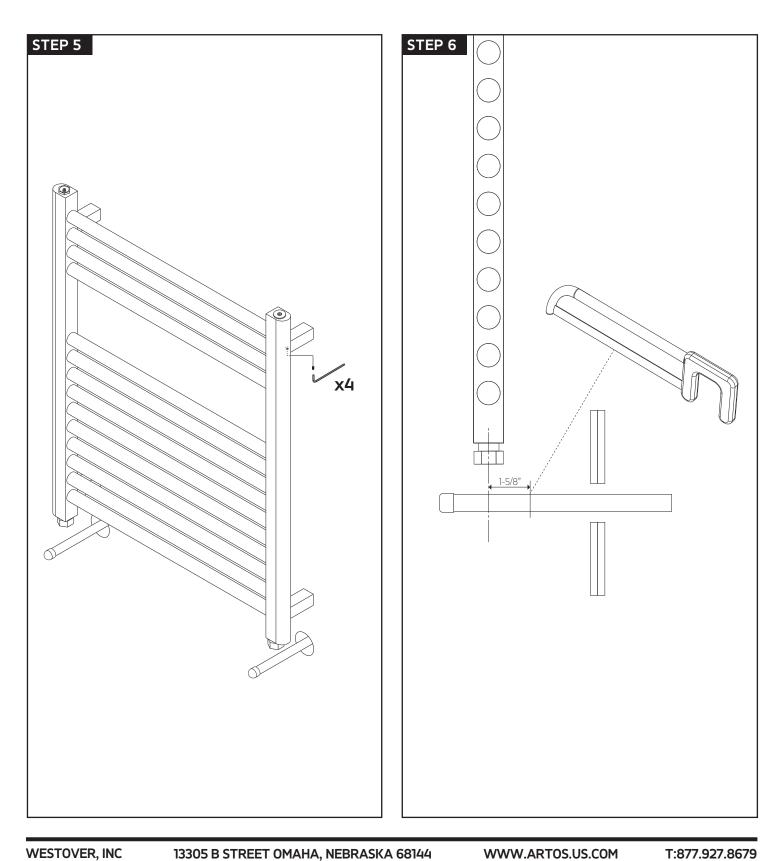


WESTOVER, INC


13305 B STREET OMAHA, NEBRASKA 68144

T:877.927.8679

denby towel warmer, hydronic

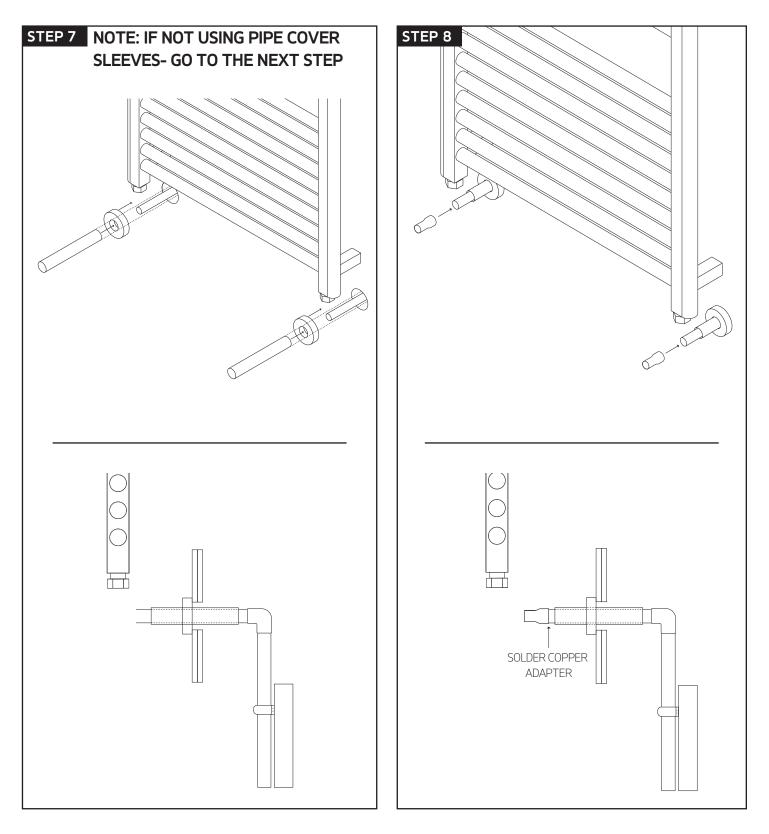

INSTALLATION STEPS

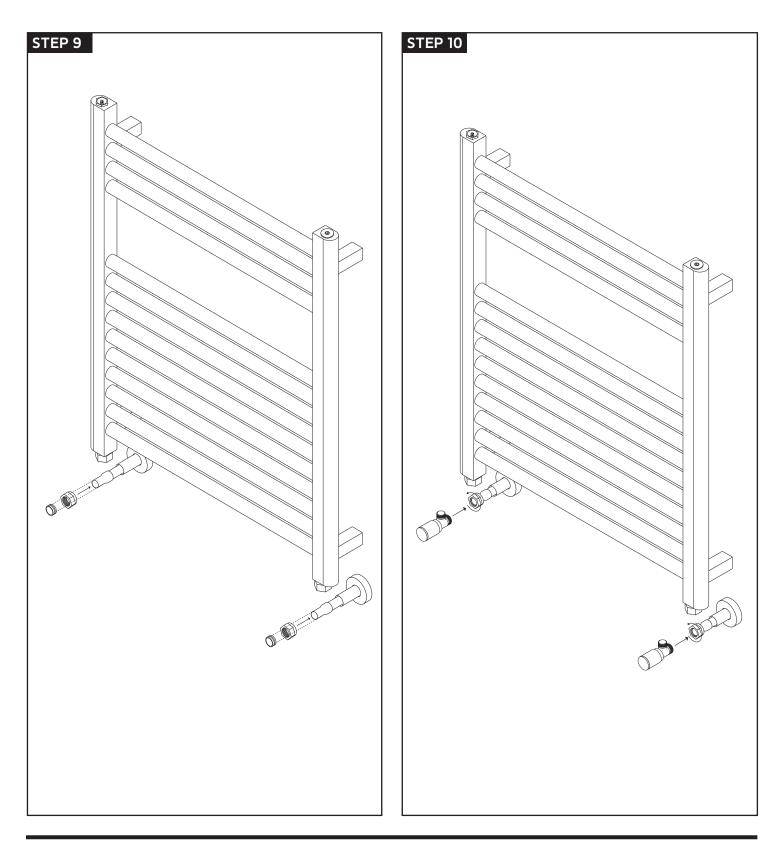


WESTOVER, INC

13305 B STREET OMAHA, NEBRASKA 68144

WWW.ARTOS.US.COM T:877.927.8679

denby towel warmer, hydronic

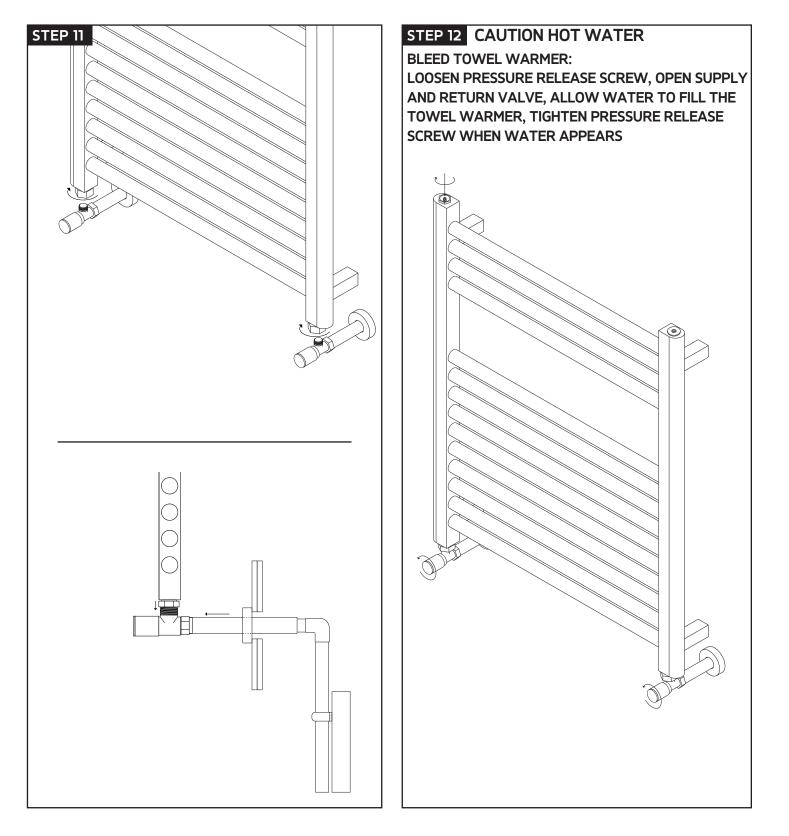


INSTALLATION STEPS

artos®

M06875H

PARTS BREAKDOWN

denby towel warmer, hydronic

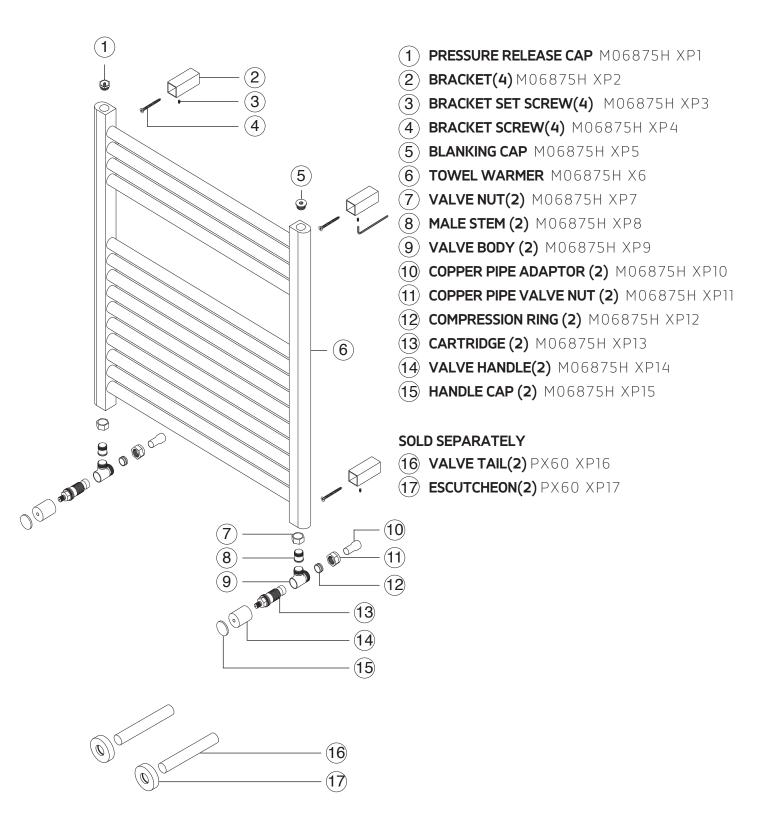

13305 B STREET OMAHA, NEBRASKA 68144

WWW.ARTOS.US.COM

artos

DECORATIVE TOWEL DRYERS

Artos® Warranty Decorative Towel Dryers

Artos® towel dryers have been manufactured under the highest quality and manufacturing standards.

Artos® towel dryers have a 5-year warranty against leaks and manufacturing defects to the finish. The heating element itself has a 2-year warranty.

For best results, keep the following in mind to retain the high quality finish of your Artos towel warmer:

- Use a soft, dampened sponge or cloth. On no account should you use a abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applyin to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately afte applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry an water from the surface after each use.

This warranty applies to installations in the US, Canada and Mexico (North America). Commercial, Industrial or business uses are warranted for a period of one year from the original date of purchase. This warranty is non-transferable and applies exclusively to the original owner or end-user.

If a defect is found during normal use, Artos® will, at its election, repair, replace or make an appropriate adjustment. Damage caused by accident, misuse, abuse, improper installation or alteration will void the warranty.

This warranty does not cover replacement parts where damage is caused by normal wear and tear. Labor charges, installation or other incidental or consequential costs will not be covered. Replacement parts that qualify for warranty repair can be obtained by contacting Artos® at 1-877-9ARTOS9 or by e-mail at info@artos.us.co

Proof of purchase (original sales receipt) from the original consumer purchaser must accompany all warranty claims. When submitting your claim in writing, please provide your name, address and telephone number.