MR06560P

ryton towel warmer, plug-in

BRUSHED NICKEL(BN)





CHROME(CH)



POLISHED NICKEL(PN)







INSTALLATION GUIDE

artos®

MR06560P

OPERATING SPECIFICATIONS

ryton towel warmer, plug-in



FEATURES Towel warming, drying and auxiliary heating.

ELEMENT 300W, 110V

CODES UL Approved CSA-US Approved


REQUIREMENTS

The towel warmer must be installed so that the Element is at the bottom.

MR06560P

PRODUCT DIMENSIONS


ryton towel warmer, plug-in

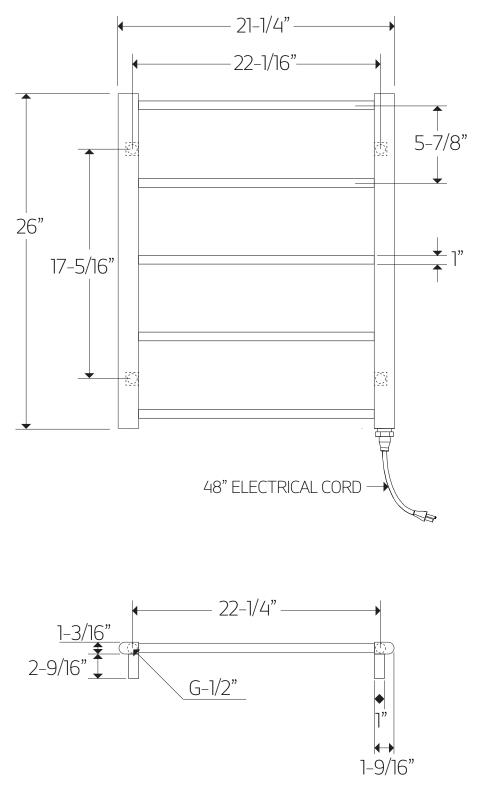

artos®

MR06560P

ryton towel warmer, plug-in

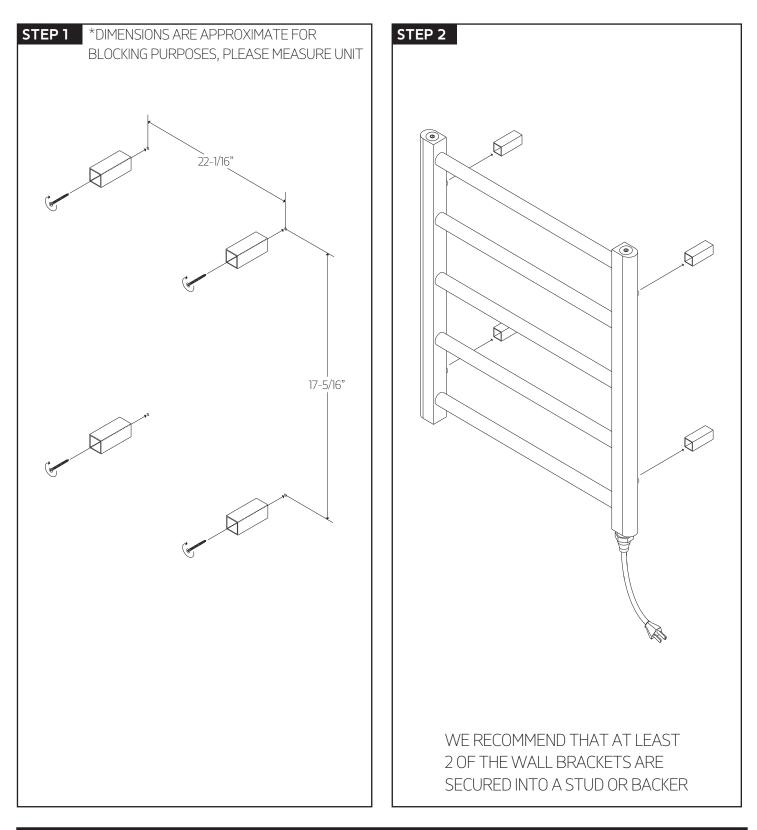


WESTOVER, INC

13305 B STREET OMAHA, NEBRASKA 68144

WWW.ARTOS.US.COM T:877.927.8679

© 2018 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

INSTALLATION STEPS

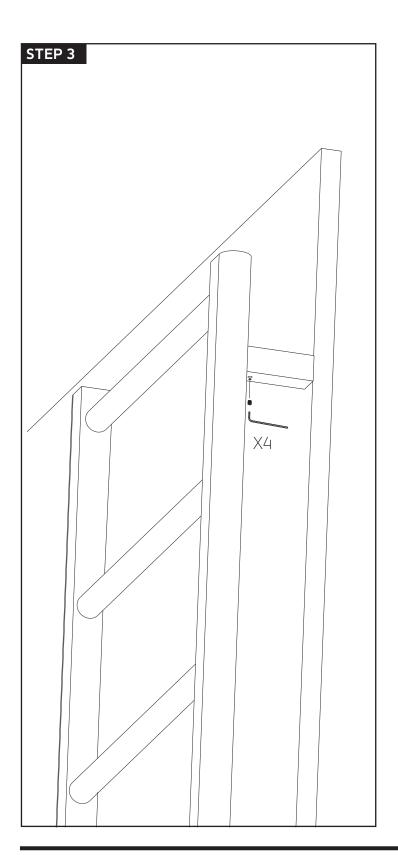

WESTOVER, INC

13305 B STREET OMAHA, NEBRASKA 68144


WWW.ARTOS.US.COM T:877.927.8679

© 2018 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos

MR06560P

ryton towel warmer, plug-in

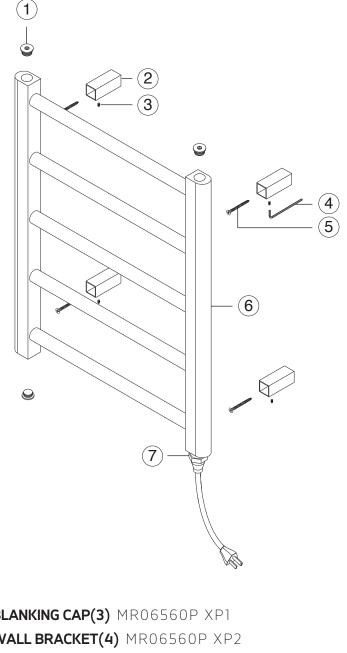

PARTS BREAKDOWN

- (1) BLANKING CAP(3) MR06560P XP1
- (2) WALL BRACKET(4) MR06560P XP2
- (3) BRACKET SET SCREW(4) MR06560P XP3
- (4) ALLEN WRENCH MR06560P XP4
- (5) BRACKET SCREW(4) MR06560P XP5
- (6) TOWEL WARMER MR06560P XP6
- ELEMENT MR06560P XP7 (7)

© 2018 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos

DECORATIVE TOWEL DRYERS

Artos® Warranty Decorative Towel Dryers

Artos® towel dryers have been manufactured under the highest quality and manufacturing standards.

Artos® towel dryers have a 5-year warranty against leaks and manufacturing defects to the finish. The heating element itself has a 2-year warranty.

For best results, keep the following in mind to retain the high quality finish of your Artos towel warmer:

- Use a soft, dampened sponge or cloth. On no account should you use a abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applyin to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately afte applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry an water from the surface after each use.

This warranty applies to installations in the US, Canada and Mexico (North America). Commercial, Industrial or business uses are warranted for a period of one year from the original date of purchase. This warranty is non-transferable and applies exclusively to the original owner or end-user.

If a defect is found during normal use, Artos® will, at its election, repair, replace or make an appropriate adjustment. Damage caused by accident, misuse, abuse, improper installation or alteration will void the warranty.

This warranty does not cover replacement parts where damage is caused by normal wear and tear. Labor charges, installation or other incidental or consequential costs will not be covered. Replacement parts that qualify for warranty repair can be obtained by contacting Artos® at 1-877-9ARTOS9 or by e-mail at info@artos.us.co

Proof of purchase (original sales receipt) from the original consumer purchaser must accompany all warranty claims. When submitting your claim in writing, please provide your name, address and telephone number.

© 2019 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.