

For use on doors 1-3/8" to 2" (35 mm - 51 mm) thick


TOOLS REQUIRED FOR NEW INSTALLATION:
 (1) Phillips Head Screwdriver
 (1) 2-1/8" (54 mm) Hole Saw
 (1) 1" (25.4 mm) Drill Bit
 (1) 5/16" (8 mm) Drill Bit
 (1) Chisel
 (1) Catch-Release Tool (Provided)

TOOLS REQUIRED FOR REPLACEMENT INSTALLATION:
 (1) Phillips Head Screwdriver

FOR REMODELING OR NEW CONSTRUCTION:
 -Follow all steps

FOR REPLACEMENT OF EXISTING LOCK:
 -Follow steps 3C, 4C, 5 through 9 after removal of old lock


NOTE:
 Failure to install thru-bolts and removable screw posts voids BHMA certification, UL rating, and warranty.

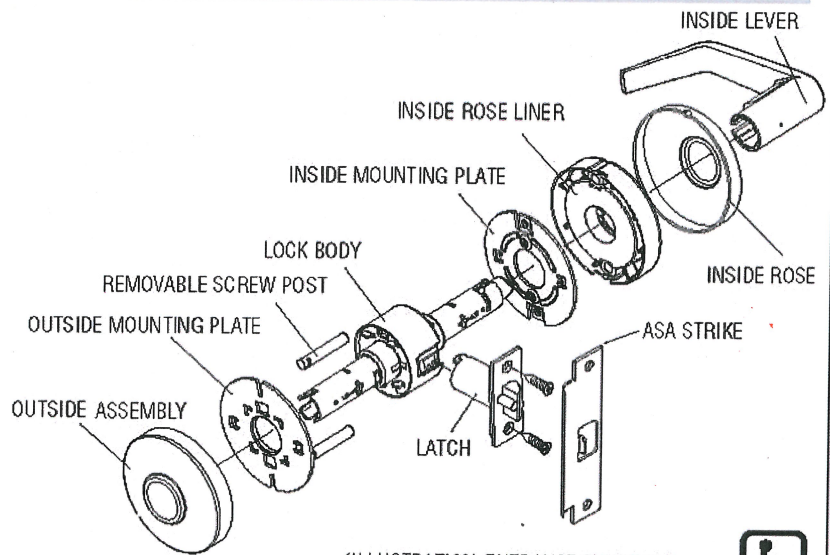

(ILLUSTRATION: ENTRANCE FUNCTION)




1. MARK DOOR




Measure center line of lock; height as desired from finished floor. Select 2-3/4" or optional 2-3/8" backset, fold and apply template to high side of door bevel and mark center of door edge as indicated on template. Mark center hole and screw-post holes on door face through guide on template.

2. DRILL HOLES




Drill 2-1/8" (54 mm) hole through door face as marked for lockset. (It is recommended that holes be drilled from both sides on wood doors to prevent splitting.) Drill 5/16" (8 mm) holes for screw-posts. Drill 1" (25.4 mm) hole in center of door edge for latch.


3. INSTALL LATCH



A. Insert latch in hole keeping it parallel to face of door. Mark outline of latch face plate and remove latch.




B. Chisel 5/32" (4 mm) deep or until latch face plate is flush with door edge.




C. Insert latch and tighten to the door using #8 screws. NOTE: Latchbolt bevel must face to closing direction.

4. INSTALL STRIKE


A. Close door until latchbolt touches jamb. Locate strike in jamb and center line of strike. Open door and extend line to door stop. Measure one half of door thickness plus 1/8" from door stop. Vertically mark center line for strike.



B. Drill two (2) 1" (25.4 mm) holes 3/4" (19 mm) deep in door jambs 5/16" (8 mm) above and 5/16" (8 mm) below horizontal center line. CAUTION: To ensure proper lockset function, hole in jamb must be drilled a full 3/4" (19 mm) deep.




C. Cut out jamb mortise for strike 3/32" (2.4 mm) deep or until strike is flush with jamb. Tighten screws. Latch stops against strike, as illustrated.




5. REMOVE INSIDE TRIM

Use catch release tool to depress lever catch visible under hole of inside lever shank and slide off inside lever, rose, rose liner, and mounting plate.

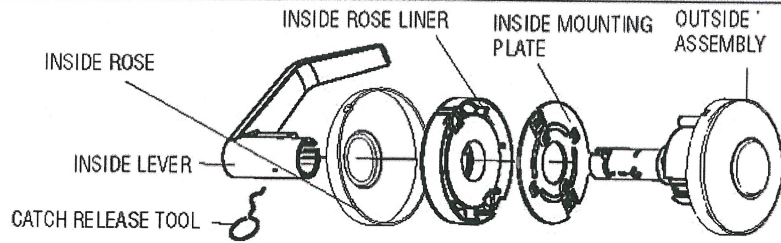


6. ADJUST DOOR THICKNESS



A. Outside mounting plate is pre-set for 1-3/4" door thickness. To fit different door thicknesses, remove outside rose and rose liner. Now adjust the outside mounting plate by rotating plate until tip of catch release tool lines up with desired door thickness indicated on lock body assembly.

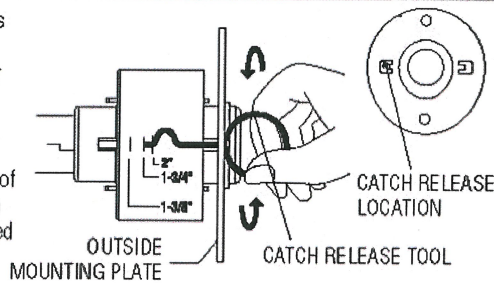

B. Install removable screw post into slots on outside mounting plate. Install rose liner and align rose liner arrow in the direction of the lock stile. Install outside rose onto lock body assembly.

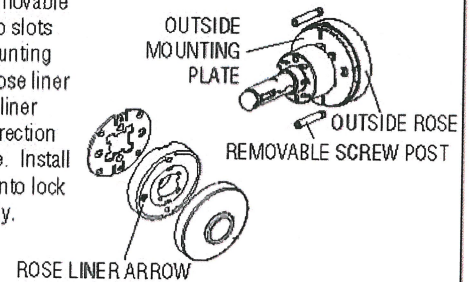


7. INSTALL OUTSIDE ASSEMBLY

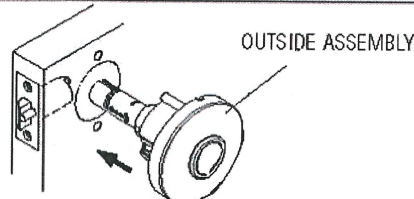


Install outside assembly on the door. Make sure tail of latch engages with retractor correctly as illustrated.

8. INSTALL INSIDE MOUNTING PLATE AND ROSE LINER

A. Install mounting plate tight to door face and tighten screws securely to the lockbody using interior mounting holes.

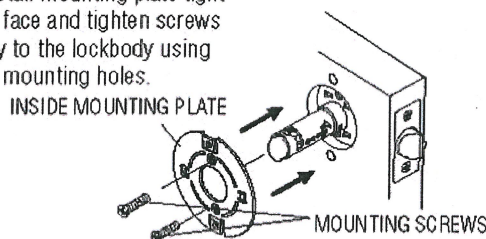


B. Install inside rose liner and align rose liner arrow in the direction of the lock stile. Tighten rose liner to the thru posts using mounting screws.

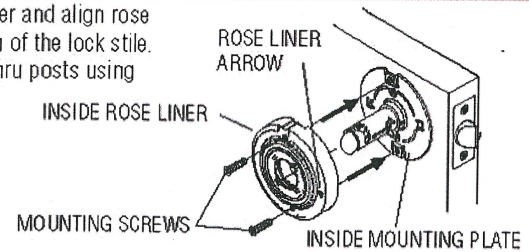

9. INSTALL INSIDE ROSE AND LEVER

A. Align indent on inside rose with groove on inside rose liner. Press inside rose onto inside rose liner and rotate clockwise to fully seat inside rose.



B. Push lever all the way in until it clicks into catch hole.

