


Product Information

- Notes:**
- For use on concrete walls
 - Manual holder ideal for interior and exterior applications
 - Unit functions as a stop, but can serve as a "Hold Open" when hook is manually engaged
 - Ideal for use with locksets with a projection of 3-5/16" (84 mm) or less

Wall Stop and Holder

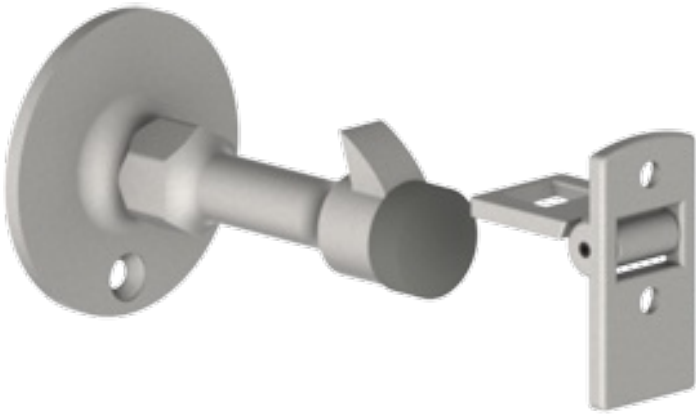

Product Specifications

- Base diameter:** - 2-11/32" (60 mm)
- Base projection:** - 3-19/32" (89 mm)
- Keeper:** - 1" x 2" (25 mm x 51 mm)
- Fasteners:** - Three (3) #10 x 1" FPH tapping screws, one (1) plastic anchor, and one (1) 5/16" - 18 x 2-1/2" threaded stud, and one (1) 5/16-18 lead anchor
- Material:** - Cast brass with black rubber bumper
- Finishes:** - US3, US4, US10, US10B, US15, US26, US26D
- Certifications:** - Meets ANSI A156.16 for L01351
- Engaged projection:** - 5-19/32" (142 mm)