




3216
Grade 2 Thumbturn Deadlock with Indicator
Auxiliary and primary locking

- Lifetime warranty
- Non-handed
- Supplied with emergency key
- Occupancy indicator outside

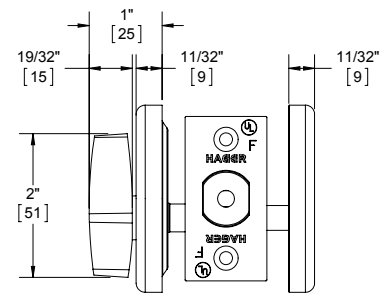

- Standard Door Prep: · Cylinder hole: 2-1/8" (54 mm) diameter (cross bore)
- Certifications: · Latch hole: 1" (25 mm) diameter (edge bore)
- BHMA Certified ANSI A156.5 Grade 2
 - ANSI A250.13 Severe Windstorm Resistant Component
 - UL/cUL Listed for all functions up to 3 hours for "A" label single doors
 - UL10C Positive Pressure Rated
 - UL10B Neutral Pressure Rated
 - ADA thumbturn
- Exposed Trim: · Wrought brass, bronze, or stainless steel
- Mechanism: · Steel, zinc dichromate plating
- Door Thickness: · 1-3/8" - 1-3/4" (35 mm - 45 mm) - Standard
- Backset: · 2-3/8" - 2-3/4" adjustable backset supplied
- Latchbolt: · 1" (25 mm) throw - Brass with concealed hardened steel roller to prevent sawing or cutting
- 1-1/8" x 2-1/4" (29 mm x 57 mm) Square Corner faceplate
- Strikes: · 3930 Square Corner, 1-1/8" x 2-3/4" (29 mm x 70 mm) with dustbox - Standard
- 3929 ASA deadbolt strike - Optional
- Finishes: · US3, US4, US10, US10B, US26D, US32, US32D
- Options: · Split finish
- Additional deadbolts and strikes available

