


NOTES:

- 292D CONSISTS OF TWO 292S FOR TWO POINT LATCHING.
- 292D HAS A 3 HR FIRE RATING FOR METAL DOORS UP TO 4 FT. WIDE X 9 FT TALL.
- DIMENSIONS SHOWN ON TEMPLATE ARE FOR TOP FLUSH BOLTS. FOR BOTTOM FLUSH BOLTS INVERT & MEASURE FROM BOTTOM EDGE OF THE DOOR.
- DO NOT INSTALL THE ACTIVE DOOR STRIKE IF GAP BETWEEN THE TWO DOORS IS LESS THAN 3/16" [4.5].






INSTALL CURVED LIP ON THE DOOR EDGE THAT MAKES INITIAL CONTACT WITH FLUSHBOLT ON THE INACTIVE DOOR

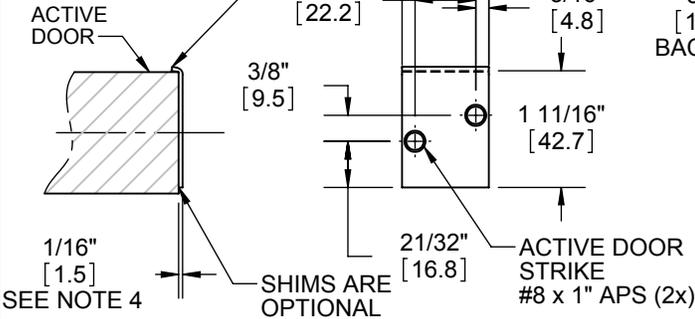

SEE NOTE 4

292S/292D* AUTOMATIC FLUSHBOLT METAL DOOR & FRAME PREP TEMPLATE

* SEE NOTE 1

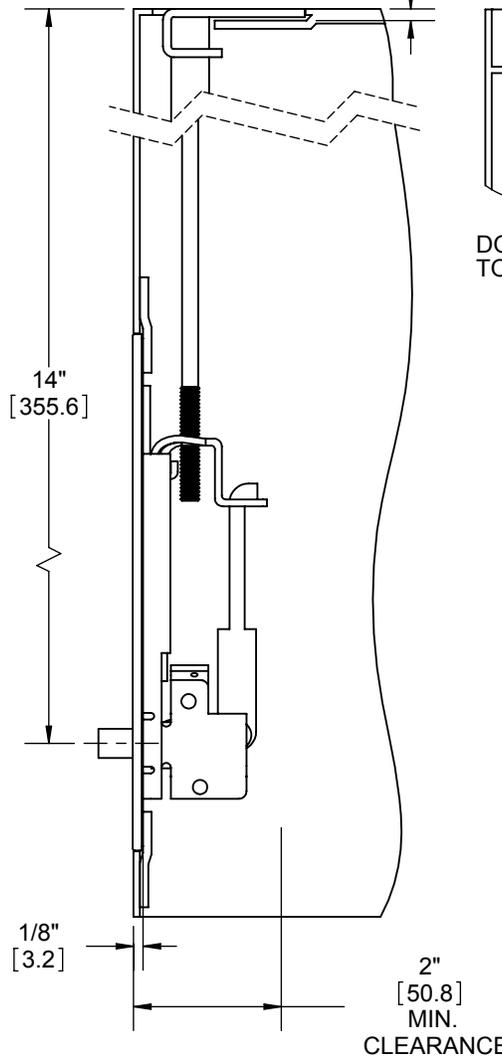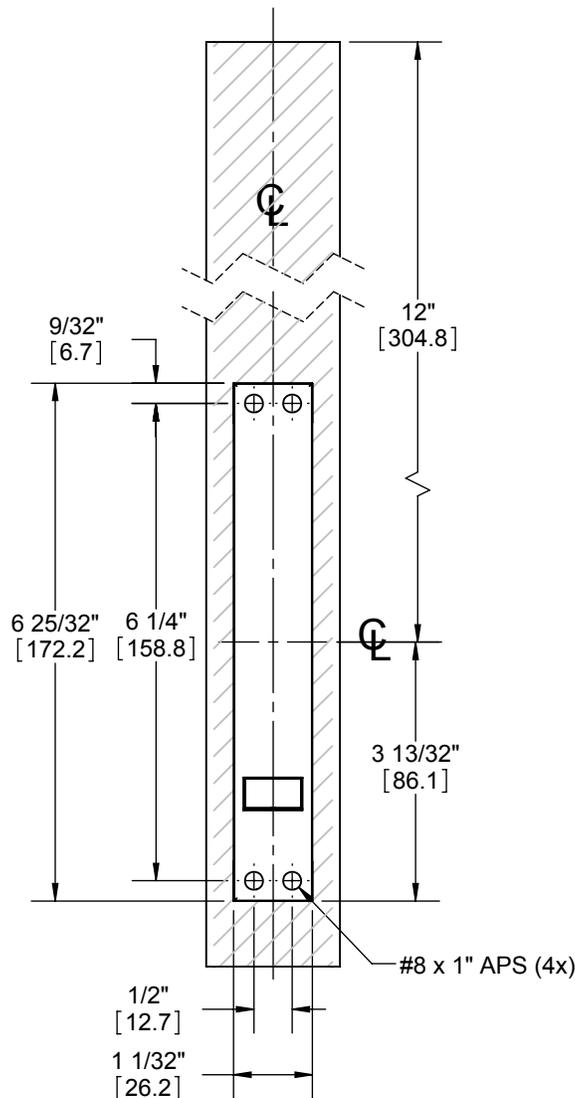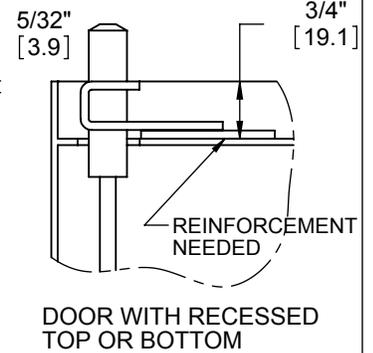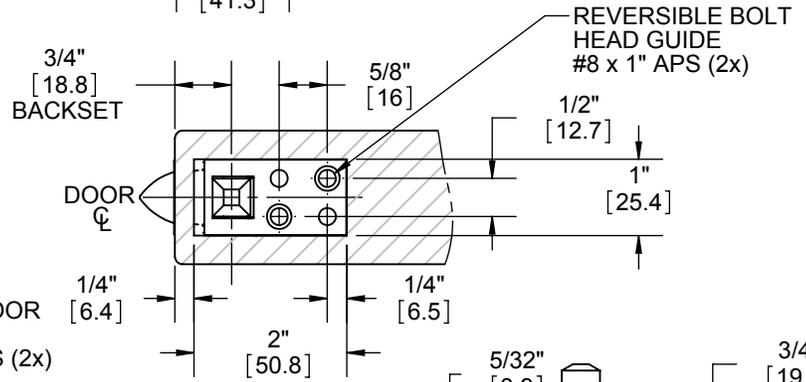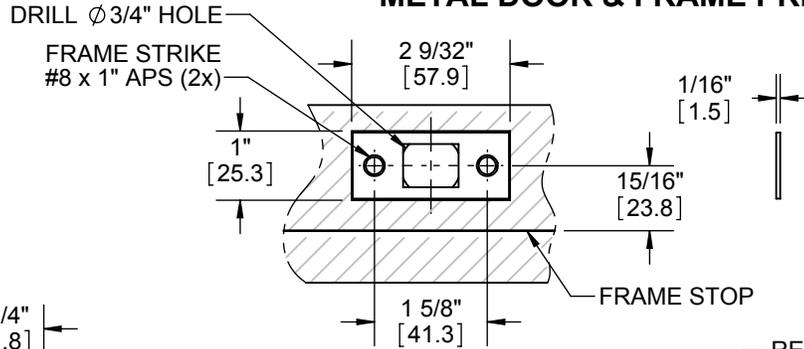

NOTE: HAGER RESERVES THE RIGHT TO MAKE PART CHANGES AND IS NOT RESPONSIBLE FOR OBSOLETE DRAWING ERRORS. TO ENSURE YOUR DRAWING IS CURRENT VISIT WWW.HAGERCO.COM.



NOT TO SCALE

DIMENSIONS IN [] ARE IN MILLIMETERS