

THIS SIDE UP FOR LHR DOOR

4500 RIM FIRE RATED EXIT DEVICE FIRE RATED REMOVEABLE MULLION TEMPLATE FOR USE WITH 4912 FIRE RATED STRIKE & HOOK (FOR FIRE RATED DEVICES ONLY)

(REV: 04)
DWG NO: T-ED00090

FOLD HERE
CAUTION
DO NOT USE DOOR EDGE!

PLACE THIS SIDE ON MULLION STOP
PLACE THIS SIDE ON DOOR


(2x) METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS.
WOOD: PRE-DRILL 1/8" HOLES.

(3x) METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS.

(4x) SEXBOLTS REQUIRED FOR FIRE RATED REMOVEABLE MULLION:
SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,
3/8" HOLES ON PULL SIDE.
TRIM: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,
1/2" HOLES ON PULL SIDE.

(2x) METAL: DRILL/TAP FOR 1/4"-20 MACHINE SCREWS.
SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,
3/8" HOLES ON PULL SIDE.

5/8" CLEARANCE HOLE FOR BE & CE TRIM.
NOT REQUIRED FOR DUMMY TRIM.
FOR NL TRIM SEE INSTRUCTIONS/TEMPLATE
FOR HOLE REQUIREMENTS.

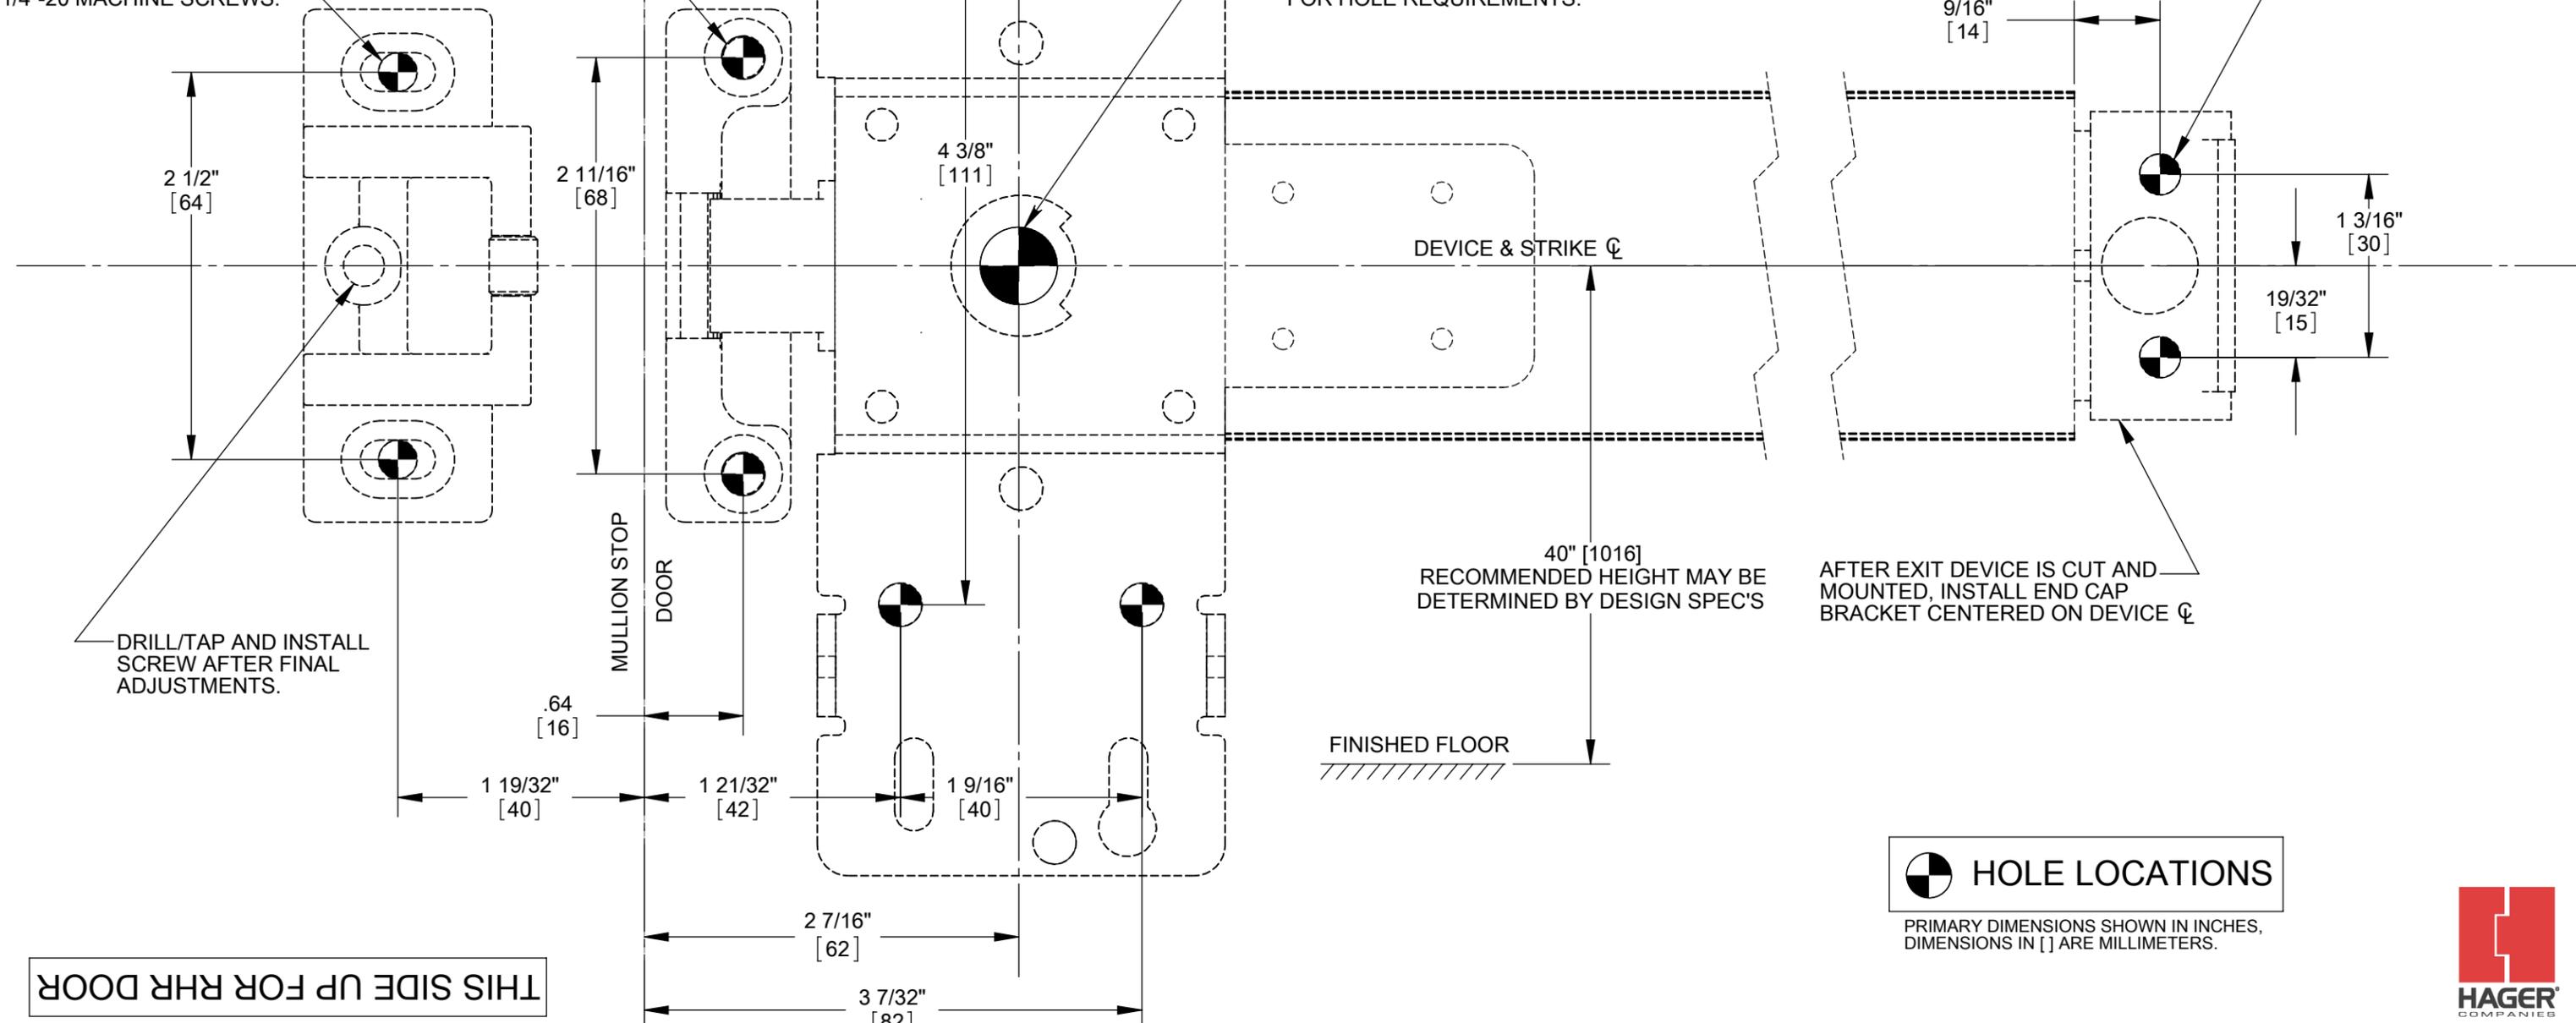

DRILL/TAP AND INSTALL
SCREW AFTER FINAL
ADJUSTMENTS.

40" [1016]
RECOMMENDED HEIGHT MAY BE
DETERMINED BY DESIGN SPEC'S

AFTER EXIT DEVICE IS CUT AND
MOUNTED, INSTALL END CAP
BRACKET CENTERED ON DEVICE ϕ

THIS SIDE UP FOR RHR DOOR

