




PRODUCT SPECIFICATIONS
For more information visit www.hagerco.com

452 Double Lipped Strike - Center Hung Doors

452

Center Hung Double Lipped Strike

Applications

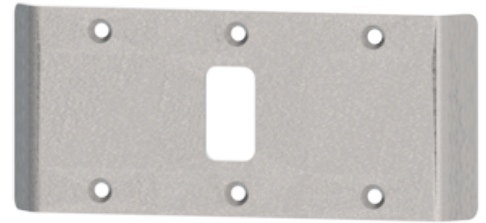

PRODUCT SPECIFICATIONS

Box Quantity:
1

Certifications:
ANSI A1882

Door Thickness:
1-3/4"

Fastener Size - Machine:
1/2" x 8-32"

Finishes:
US26D

Gauge:
See Sizing Chart Options

Hole Count:

Material:
Brass

Notes:
Center hung doors. To be used with Hager 600, 611, and 612 pivots and door release - this allows doors to be opened in both directions without damage to frame. Standard latchbolt cutout is 1-1/4" x 11/16" (32 mm x 17 mm). Standard strike plates are optimized for cylindrical locks/latches mounted on 1-3/4" thick doors. Mortise lock applications require special latch cutout location (consult specific manufactures for variations of cutout dimensions). For use with Camtrol double acting pivot. Frame width: 6-3/4" x 2-3/4"

Options:
Other sizes available, contact Hager Customer Service for more information.

Product Name:
Double Lipped Strike Center Hung Doors

H Width:
See Sizing Chart Options