
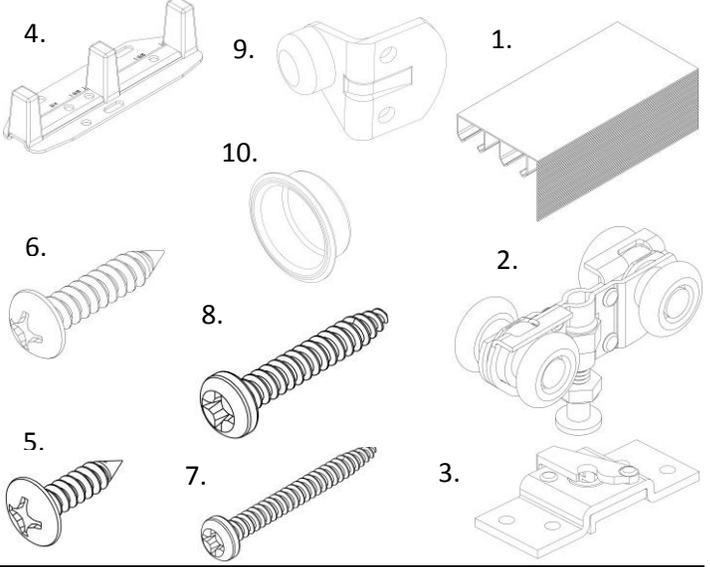
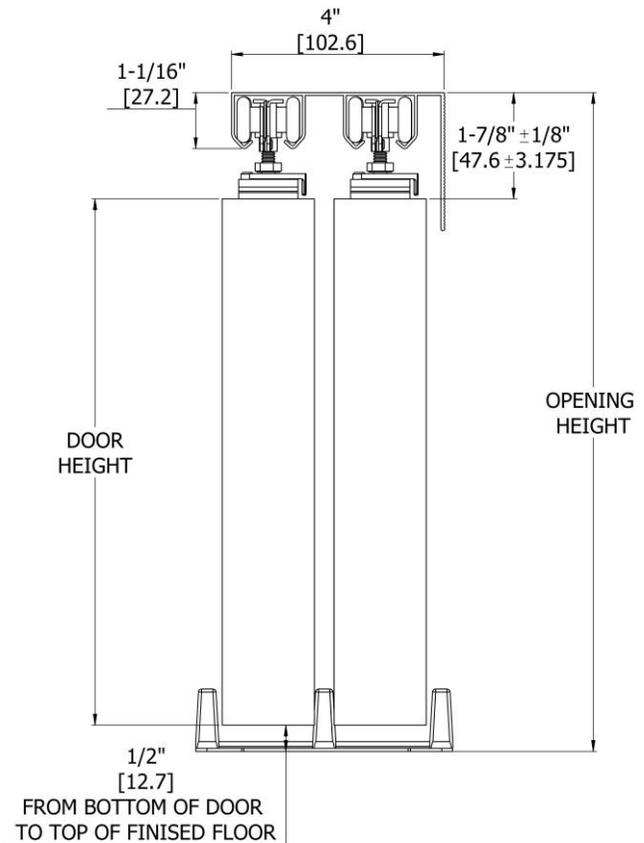


CONTENTS	9673	9674	
1. TRACK (9820)	1	1	
2. CARRIER	4 (9605)	4 (9606)	
3. QUICK RELEASE PLATE (9610)	1	1	
4. FLOOR GUIDE (9353)	1	2	
5. #8 X 5/8" PTHS	16	16	
6. #8 X 3/4" PPHS	2	2	
7. #8 X 1-1/2" PPHS	3	3	
8. #8 X 1" PPHS	16	16	
9. DOORSTOP (9880) (sold separately)	1	1	
10. PULL (Sold separately)	2	2	



1 PREPARE OPENING

OPENING HEIGHT MAX = DOOR HEIGHT + 2-1/2"
 OPENING HEIGHT MIN = DOOR HEIGHT + 2-1/4"

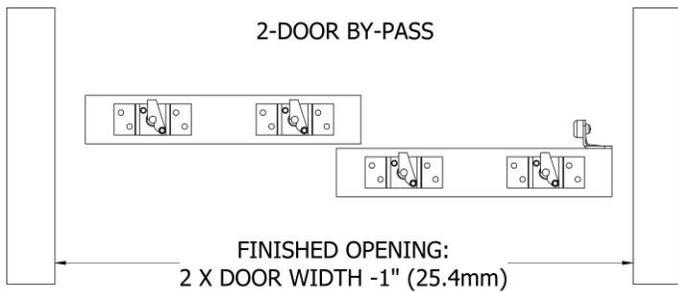


2 INSTALL TRACK AND HANGERS

- Center track in opening and secure with (#8 x 5/8") screws
- Leave a 1" gap between right end of track and door frame to allow for carrier removal
- Center quick release plates on door thickness
- Mount left plate edge 1" from near left door edge
- Mount right plate edge 2-3/4" from right door edge
- Secure Carriers onto door with (#8 x 1") screws

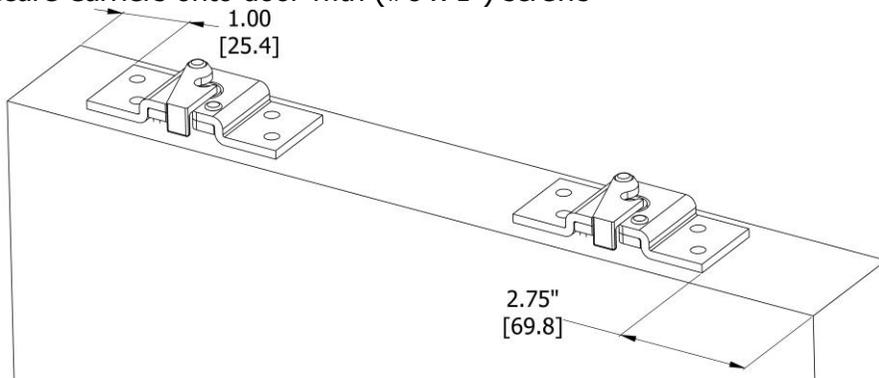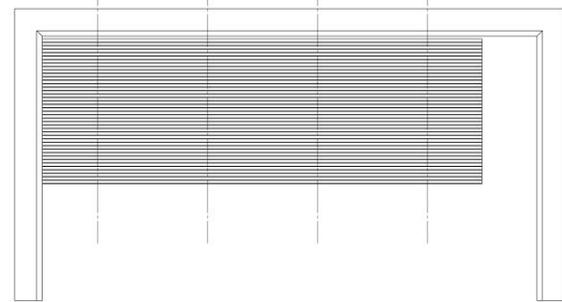

3 HANG DOORS

- Open quick release latches on brackets
- Slide door onto carrier screws and close hatch
- Repeat for front door on front rail

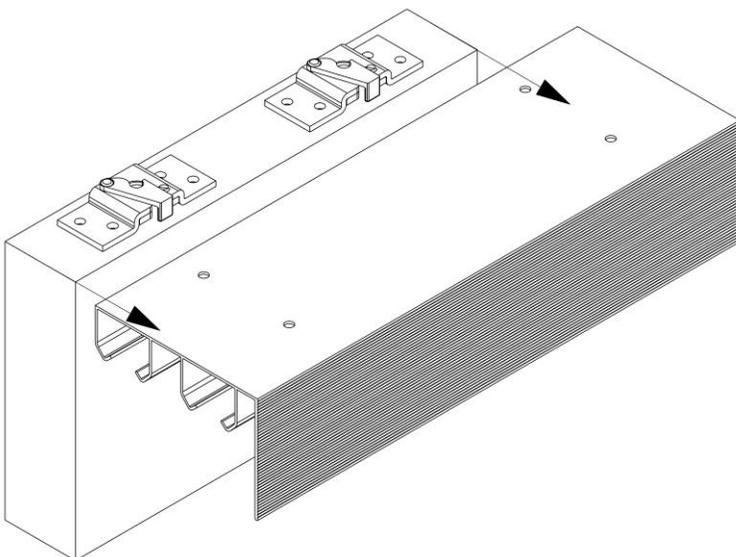

4 ADJUST AND FINISH

- Adjust carriers so door is square with frame
- Install door guides in center of opening, where doors overlap
- Drill appropriate dimensioned hole to mount door pull (optional)
- Install stops (optional)

