

WTAB700


Three Knuckle
Concealed Anti-Friction Bearing
Standard Weight - Wide Throw

Application:

- ANSI A8112 (Brass)
- Non-rising removable pin with flush pin and plug
- For use with medium weight doors or doors requiring medium frequency service

Electric Modifications:

- [EMN](#) (Electric Monitor Only)
- [ETW](#) (Electric Through-Wire Only)
- [ETM](#) (Electric Through-Wire with Monitoring)
- [Quick Connect](#)

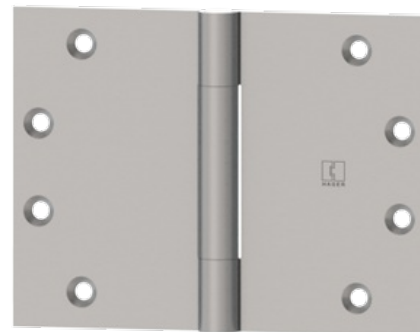

PRODUCT SPECIFICATIONS

MATERIAL:

- Steel with Steel pin

FINISHES:

- LS, USP, US3, US4, US10, US10A, US10B, US26, US26D

PRODUCT SIZE OPTIONS

HINGE SIZE (INCHES)	HINGE SIZE (MM)	GAUGE OF METAL	HOLE COUNT	SCREW SIZE (MACHINE)	SCREW SIZE (WOOD)
4 1/2 x 5	114 x 127	0.134	8	1/2 x 12-24	1 1/4 x 12
4 1/2 x 6	114 x 152	0.134	8	1/2 x 12-24	1 1/4 x 12
4 1/2 x 7	114 x 178	0.134	8	1/2 x 12-24	1 1/4 x 12
4 1/2 x 8	114 x 203	0.134	8	1/2 x 12-24	1 1/4 x 12
5 x 6	127 x 152	0.145	8	1/2 x 12-24	1 1/4 x 12
5 x 7	127 x 178	0.145	8	1/2 x 12-24	1 1/4 x 12
5 x 8	127 x 203	0.145	8	1/2 x 12-24	1 1/4 x 12