

WTAB800


Three Knuckle
Concealed Anti-Friction Bearing
Standard Weight - Wide Throw

Application:

- ANSI A2112 (Brass)
- ANSI A5112 (Stainless steel)
- Hinge testing conforms to ANSI 156.1. Furnished with screw hole locations that conform to standards approved by ANSI A156.7.
- Non-rising removable pin with flush pin and plug
- For use on medium weight doors or doors requiring medium frequency service

Electric Modifications:

- [EMN](#) (Electric Monitor Only)
- [ETW](#) (Electric Through-Wire Only)
- [ETM](#) (Electric Through-Wire with Monitoring)
- [Quick Connect](#)

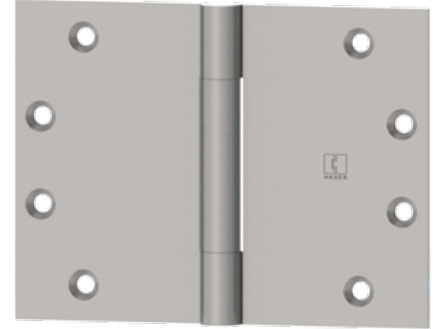

PRODUCT SPECIFICATIONS

MATERIAL:

- Brass with stainless steel pin
- Stainless steel with stainless steel pin

FINISHES:

- LS, US3, US10, US10B, US26, US26D, US32, US32D

PRODUCT SIZE OPTIONS

HINGE SIZE (INCHES)	HINGE SIZE (MM)	GAUGE OF METAL	HOLE COUNT	SCREW SIZE (MACHINE)	SCREW SIZE (WOOD)
4 1/2 x 5	114 x 127	0.134	8	1/2 x 12-24	1 1/4 x 12
4 1/2 x 6	114 x 152	0.134	8	1/2 x 12-24	1 1/4 x 12
4 1/2 x 7	114 x 178	0.134	8	1/2 x 12-24	1 1/4 x 12
4 1/2 x 8	114 x 203	0.134	8	1/2 x 12-24	1 1/4 x 12
5 x 6	127 x 152	0.145	8	1/2 x 12-24	1 1/4 x 12
5 x 7	127 x 178	0.145	8	1/2 x 12-24	1 1/4 x 12
5 x 8	127 x 203	0.145	8	1/2 x 12-24	1 1/4 x 12