


The six simple steps to install this product require a drill, 5/16" (7.9 mm) drill bit, and wrench.


STEP 1

Place the flat surface of the Hager Latch Protection Plate 3/16" (4.8 mm) in from the edge of the door.

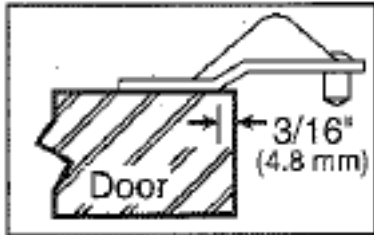


STEP 2

Center the plate vertically on the center of the lock, whether mortised or cylindrical.

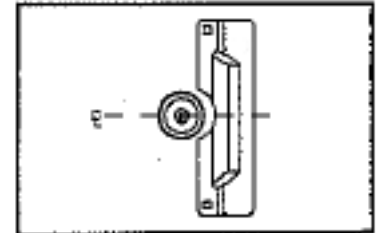

STEP 3

With the square hole held to the door, use this as a guide to drill two 5/16" (7.9 mm) diameter holes through the door.

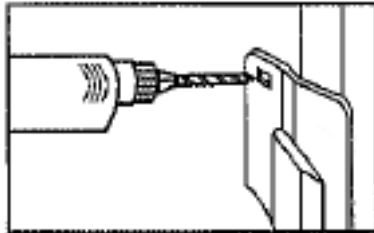

STEP 4

Insert two carriage bolts through the plate and secure with the 3/4" hex sleeve nuts on the inside.

