

723S

SFIC: Sliding Door Cylinder Housing



BEST compatible
interchangeable
core cylinders

SPECIFICATIONS

Retrofits: Best 4S

Function: For use on bypassing sliding doors.

Core acts as stop for interior sliding door.

Material: Zinc die cast

Finish: 26D or US26

INCLUDED ACCESSORIES

Screws: Includes 3 sizes of screws (7/16", 3/4" and 1") to adapt lock for use on varying material thicknesses

KEYING INFORMATION

Core: Not included, requires special core

Accepts: Best (6C or 6CP), Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores

OPTIONAL ACCESSORIES


SFIC cores: 207S Series



723S

Function: Sliding door cylinder housing for bypassing sliding doors

Material thickness: Adjustable to fit varying material thickness. Includes three screw lengths: 7/16", 3/4", and 1"

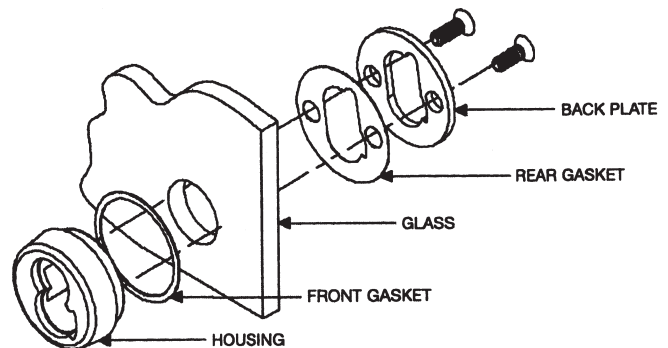

723S

SFIC: Sliding Door Cylinder Housing

OPTIONAL ACCESSORIES

207S Series Cores for use with 723S

- 207S Series 7-pin SFIC cylinder





BEST compatible
interchangeable
core cylinders



AVAILABLE KEYWAYS

A	B	C	D	E	F	G	H	
J	K	L	M	Q	1C	1D	KMT300	

DIMENSIONS | TYPICAL INSTALLATION

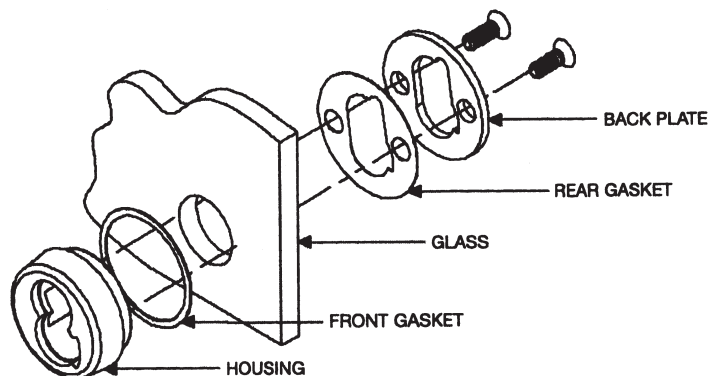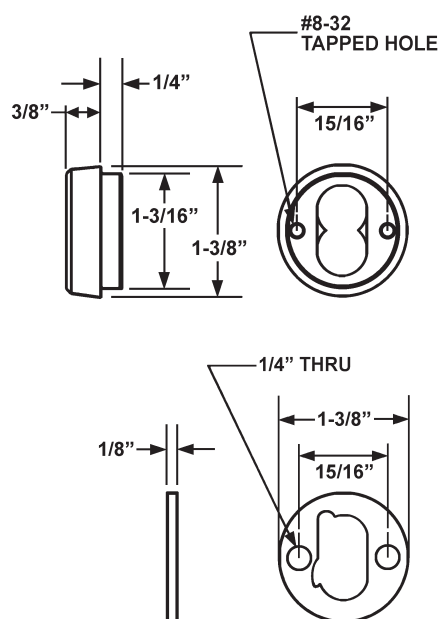

Note: Lock can be adjusted for use on different material thicknesses by using an "O" ring or changing the screw length. The 723S ships standard with 3 screw sizes (7/16", 3/4" and 1").