

CR1125

IC Core: Corbin / Russwin
Door & Drawer Locks



For CORBIN RUSSWIN
interchangeable core
cylinders

Woodwork Institute (WI)
acknowledged product

GENERAL SPECIFICATIONS

Mounting: Rim (surface)

Function: Key removable in locked and unlocked position

Barrel diameter: 1-5/32"

Cylinder length: 1-1/8"

Body: Zinc die cast cylinder housing, steel back plate and steel case

Finish: 26D

Packaged: Packed 10 per box

CYLINDER INFORMATION

Cylinder: Not included

Accepts: 6 or 7 pin Corbin/Russwin interchangeable core cylinders

INCLUDED ACCESSORIES

725-PA plastic thumbturn

1125-1 spacer to fit 6 or 7 pin cores

725-SP-RD solid rectangular strike

OPTIONAL ACCESSORIES

Spacers: WP725 (1/8" thick), WP726 (1/4" thick)

Strikes: 725-SP Series

CR1125RD


Function: Deadbolt cabinet door or drawer lock



CR1125RDVH
drawer vertical



Includes strike #
725-SP-RD



CR1125RDLH
door left-hand



CR1125RDRH
door right-hand

CR1125RL

Function: Drawer latch lock




CR1125RLVH
drawer vertical



Includes strike #
725-SP-RL

HANDING CHART

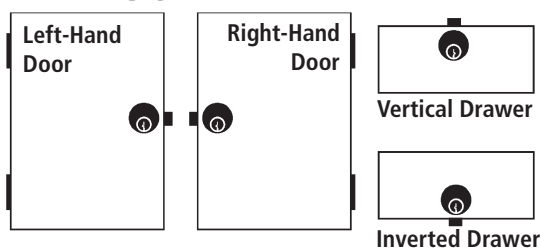

INCLUDED ACCESSORIES



725-PA



725-1

OLYMPUS
LOCK, INC.
The cabinet lock innovators.

CR1125

Woodwork Institute (WI)
acknowledged product

IC Core: Corbin / Russwin Door & Drawer Locks

OPTIONAL ACCESSORIES - See our website for a complete list of optional components.

Internal Plastic Spacers

- WP725 1/8" thick plastic spacers
- WP726 1/4" thick plastic spacers

Strikes

- Plastic bar strikes: 10-054, 10-055, 10-057, 10-058. Metal strikes: 10-056 12-1, 12-2, 12-3, 12-4, 725-SP

Trim Ring

- TR78 trim ring




WP725





WP726

DIMENSIONS | TYPICAL INSTALLATION


CR1125RD

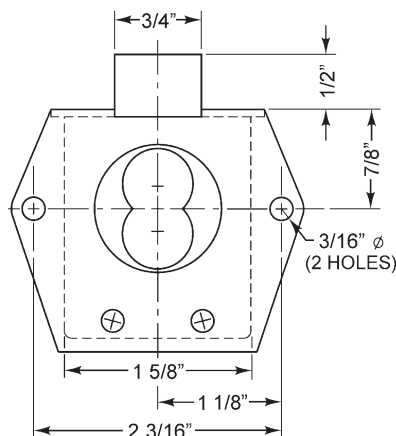

Dimensions are the same for all handings.

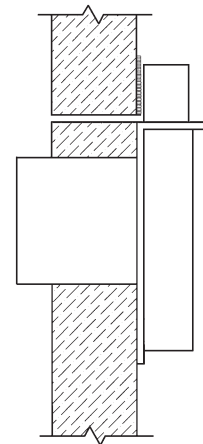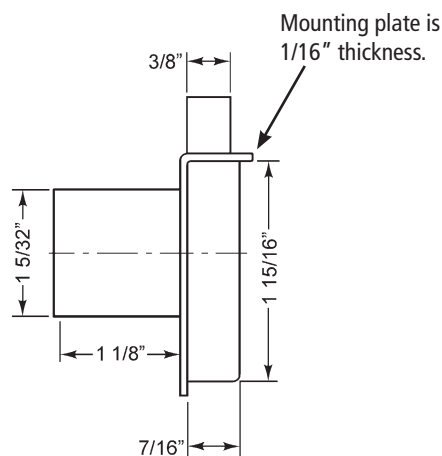

CR1125RL

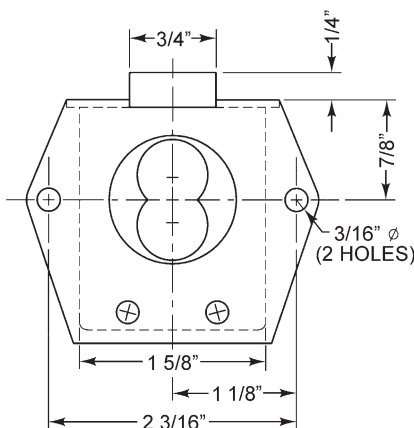

Dimensions are the same for all handings.

