

Rockwood 300

Door Edge

Mortised Lock Side

Experience a safer
and more open world

Complete this form and email to: orders.rockwood@assaabloy.com / or fax to: 800.922.9212

Customer Information

Company Name: _____ Date: _____

Account #: _____ Phone/Fax: _____ / _____

Email: _____ PO #: _____

Order Line #: _____ Quantity: _____ Handing: _____ Tag. No's: _____

Finish: _____

300: _____

Select Cutout, Door Type and Fill in Dimensions:

- ☐ **UL Rated**
- ☐ **Double Egress Doors**

_____ * **Door Edge
Height if different
from net door height**

Specify Mounting

(if not standard)


- Torx Screws

* Standard Door
Thickness is 1 3/4" if not
please advise: _____


* Standard Leg Length
for mortised edge
is 7/8" if not please
advise: _____

**Note: Your door thickness is
a nominal dimension. Doors
can vary + or - 1/16" from the
nominal dimension. When
ordering, verify actual
door thickness to assure a
working fit of the door edge.**


☐ **161 Latch
Bolt**




☐ **86 Mortise
Lock**



☐ **ASA Strike**




☐ **Cylindrical
Strike**




☐ **Manual/
Automatic
Flush Bolt
(Metal Door)**



☐ **Manual
Flush Bolt
(Wood Door)**




☐ **Automatic
Flush Bolt
(Wood Door)**



Fire Bolt


☐ **Active
Door**




☐ **Inactive
Door**



☐ **Metal Door**

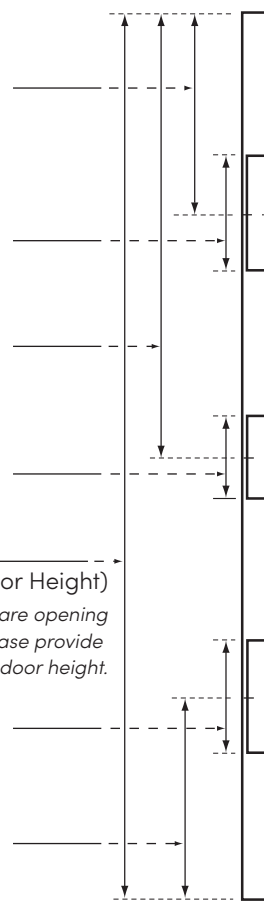

☐ **Wood Door**

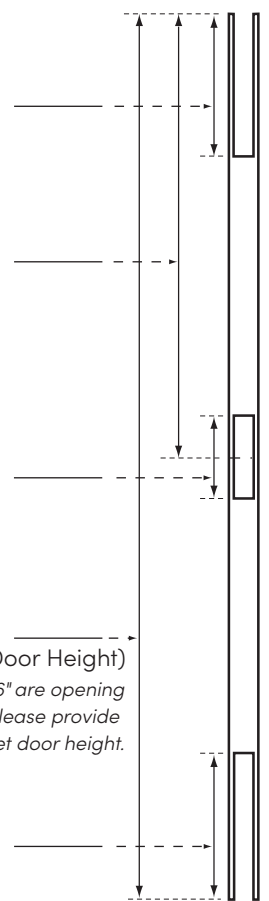

*Above is a representation of a prep location on the edge of the door.

Your signature indicates the information contained on this order form is accurate and ready to be manufactured.

(customer signature)

(date)

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Copyright © 2021-2023, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.