

Rockwood RM7825

GeoMetek Diamond Pull Series

Flat End - Offset Bridge

Experience a safer
and more open world

Complete this form and email to: orders.rockwood@assaabloy.com / or fax to: 800.922.9212

Customer Information

Company Name: _____ Date: _____
 Account #: _____ Phone/Fax: _____ / _____
 Email: _____ PO #: _____ Line #: _____
 Door #'s: _____

Quantity: _____

Finish Options:

- ☐ 10BE/613E ☐ US32/629 ☐ US32D/630
☐ US32MS ☐ US32DMS
☐ BSP ☐ WSP
☐ Stock Powder Coats (specify): _____

Center to Center (Maximum 119"): _____

Overall Height (Maximum 120"): _____

Post Quantity: ☐ 2 (Standard) ☐ Other: _____

Note: Mid Post recommended for CTC greater than 62".


Door Type: ☐ Glass ☐ Metal ☐ Wood

Door Thickness: ☐ 1/2" ☐ 1 3/4" ☐ 2 1/4"
☐ Other: _____

Hole Size (for glass door application only): _____

Mounting Type:

- ☐ Thru Bolt (Metal/Wood Only)
☐ Decorative Thru Bolt (Metal/Wood Only)
☐ Back to Back
☐ Concealed (Metal/Wood Only)
☐ Concealed and Thru Bolt (Metal/Wood Only)

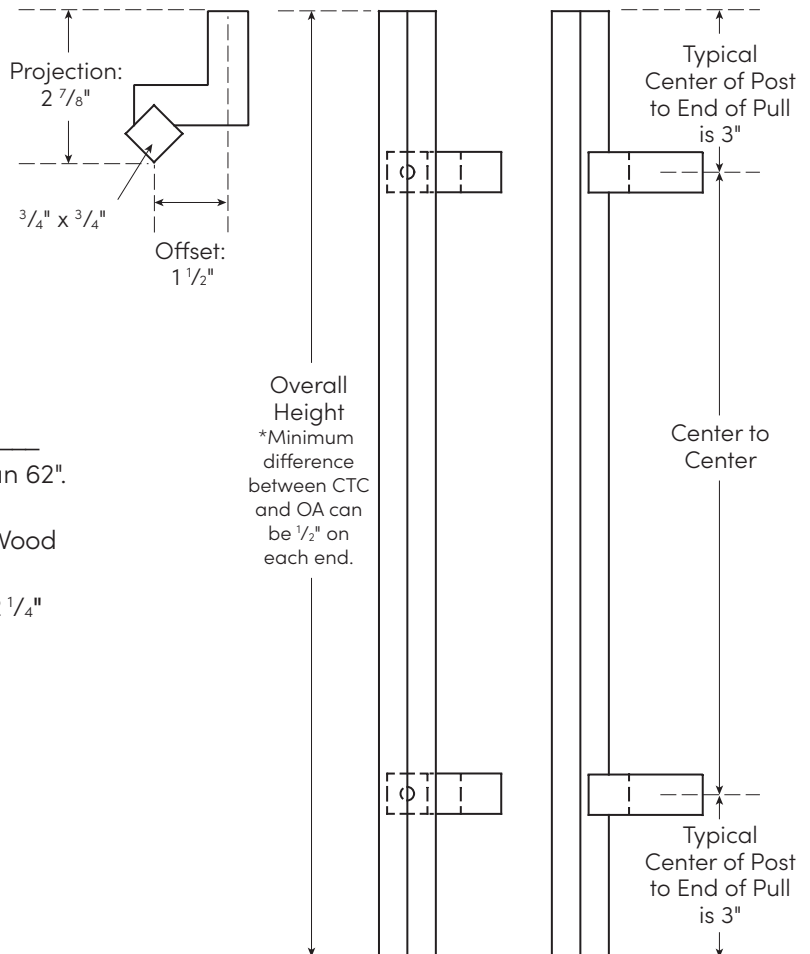

Your signature indicates the information contained on this order form is accurate and ready to be manufactured.

 (customer signature)

 (date)

Rockwood Manufacturing Company
 300 Main St.
 Rockwood, PA 15557
www.rockwoodmfg.com
 1 800 458 2424

Copyright © 2020-2022, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.