

Latchsets

Latchset Component List

- A Door Knob/Lever (2)
- B Set Screws (2)
- C Nylon Threaded Washers (2)
- D Finished Rose
- E Metal Spring Assist Sub-Rose
- F Tubular Latch

(55° Latch Parts)


R - Adaptor R

S - Spindle (Teardrop groove positioned towards set screw)

T - Tubular Latch

U – Tubular Latch Faceplate V – Adaptor V

- G Tubular Latch Faceplate
- H Tubular Latch Strike Plate
- I Metal Spring Assist Sub-Rose
- J Privacy Locking Block Machine Screw (For Privacy ONLY)
- L Privacy Locking Block (For Privacy ONLY)
- M Thru-bolts (2)
- N Finished Rose
- O Privacy Locking Pin (For Privacy ONLY)
- P Washer Installation Tool
- Q Emergency Release Key

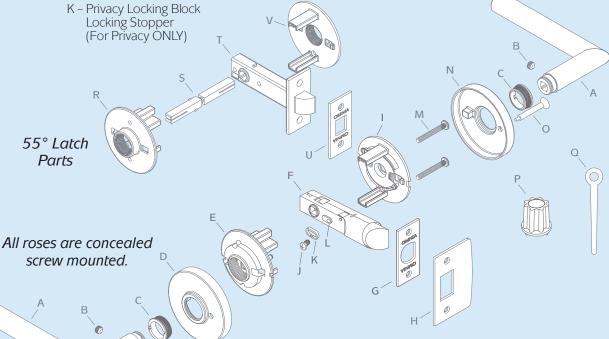

Product Data

Knob and Lever Latchset

- 2 3/8" (standard) and 2 3/8" backsets available.
- Supplied for both 13/8" and 13/4" door thickness as standard. The minimum door thickness is 11/4"; the maximum door thickness is 2 1/2" (please specify).
- All lever latchsets meet ADA accessibility requirements.


Each set consists of solid brass knobs or levers, thru-bolted rose mechanisms, finished rose covers, latch, strike, faceplate, spindle, all necessary mounting screws, installation template and instructions.

About Our Tubular Latch

- 55° rotation to retract latch. (For Knobs)
- 28° rotation to retract latch. (For Levers)
- Tough, non-rusting materials used throughout Face covers and strikes are solid brass. No.014 "Full Lip" strike supplied as standard or No.013 "T" strike as an option. (*Please specify.*)
- For over five decades, OMNIA's latches have been opening and closing hundreds of thousands of doors all around the world.

Functions

- Passage: Latch operates by knob or lever from either side of door.
- **Privacy**: Push pin provided for privacy inside room. Emergency release hole for outside room. Emergency release key also provided.
- Single Dummy: Trim on one side of door only. Available for surface mounting. Knob or lever with rose.
- Pair Dummy: Trim on both sides of door. Knob or lever with thru-bolted or concealed screw rose set.




PASSAGE LATCH

23/8" backset

(standard) or 2³/₄" backset

(optional)



7MM HUB

33/8