


# 4936 & 4937 EXTENSION ROD INSTRUCTIONS FOR USE WITH THE 4500 AND 4700 SVR EXIT DEVICES


## STEP 1

Attach extension rod and top rod (provided with exit device) by threading the rods onto the extension rod connector.

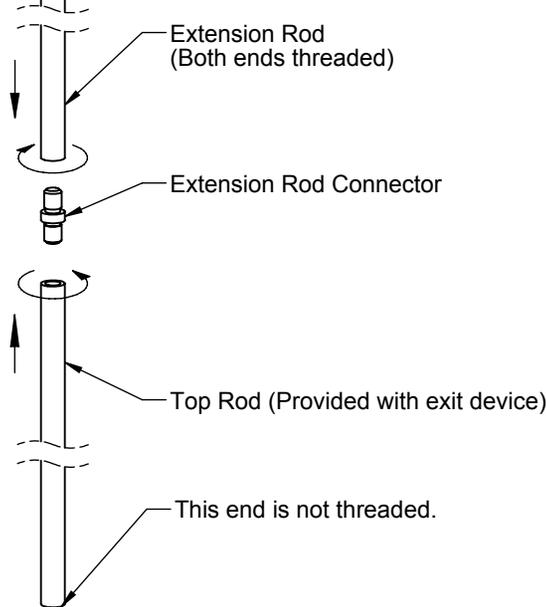

## STEP 2

Thread rod assembly from STEP 1 halfway onto Top Latch Connector.

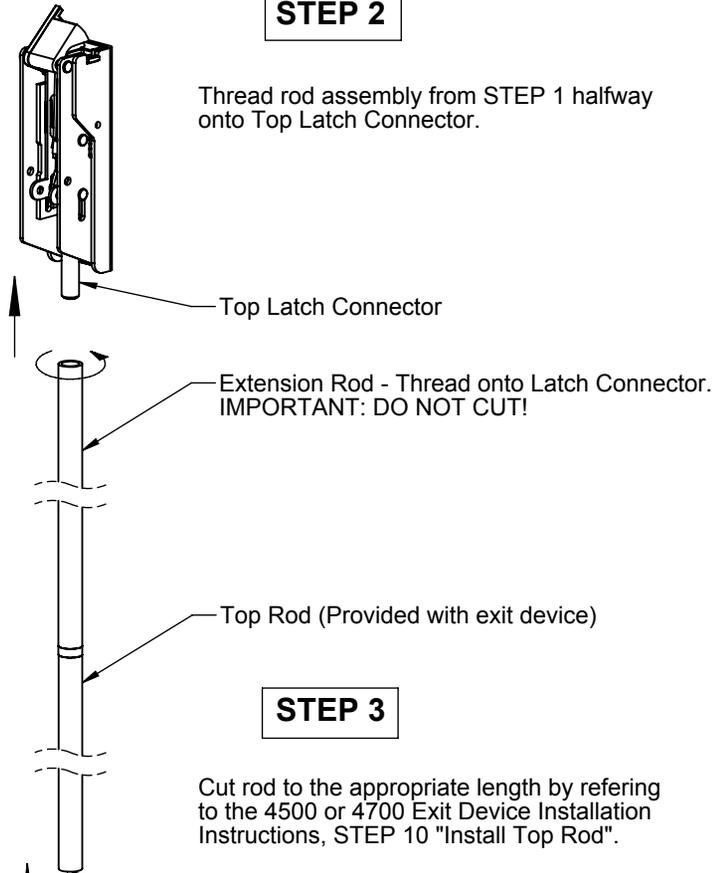

## STEP 3


Cut rod to the appropriate length by referring to the 4500 or 4700 Exit Device Installation Instructions, STEP 10 "Install Top Rod".

**IMPORTANT:  
BE SURE TO ONLY CUT THE  
END THAT IS NOT THREADED!**

Again, follow the 4500 or 4700 Exit Device Installation Instructions, STEP 10 "Install Top Rod", to install this rod connector and finalize top rod installation.

## STEP 4

An extra Rod Guide is provided with the extension rod kit. Install once you reach STEP 13 "Install Rod Guides", in the 4500 or 4700 Exit Device Installation Instructions.

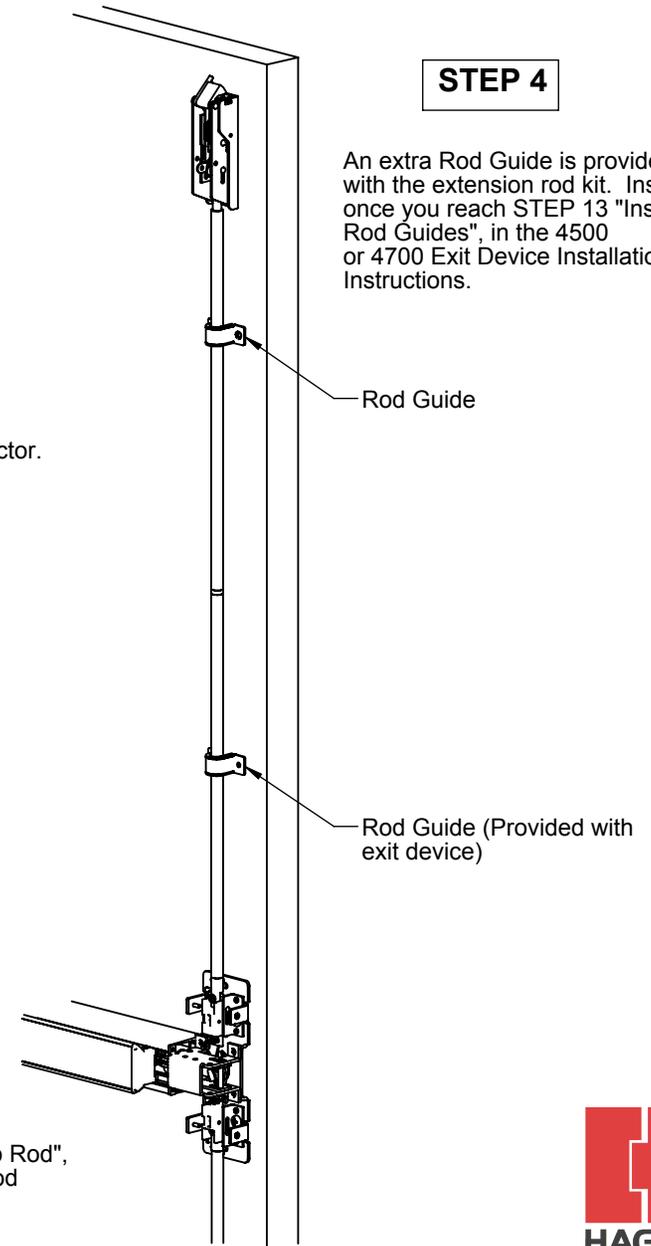

Part No.	Description
4936	24 inch Extension Rod Kit
4937	36 inch Extension Rod Kit

Possible height combinations with exit devices:

- 24" ext. rod + 7' device = 8' door
- 36" ext. rod + 7' device = 10' door \*
- 24" ext. rod + 8' device = 10' door \*
- 36" ext. rod + 8' device = 11' door \*

\* Can also be cut down to accommodate 9' door.