Utility Cam Lock

▶ **B7** Cam Lock




ל	>	۲	٢	>
Α	В	Ε	F	G
Ÿ	W	71/	Ş	
1	K	1	R	

Woodwork Institute (WI) acknowledged product


Item	Keyway	Finish	Cyl. Length*	Keying			
В7	See chart	26D	1-3/16"	O-Bit or Custom Keyed			
*Cyl. Length: As measured with straight cam.							

MOUNTING CUTOUT 3/4" 5/8" 3/4



With Trim Collar				
For Mat. Thickness	7/8"			
Straight Cam (X)	1-3/16"			
Inbent Cam (Y)	7/8"			
Outbent Cam (Z)	1-1/2"			
Cylinder Length (A)	1-1/8"			

INCLUDED PARTS

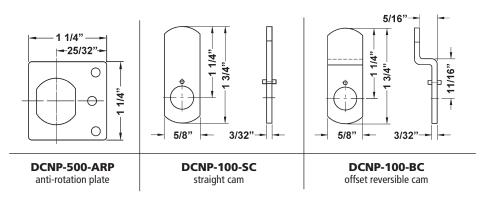

SPECIFICATIONS

Rekeyable: Patented cylinder retainer clip **US Patent Nos:** 5,038,589; 5,737,950

Retrofits: Best 5E

Usage: Commonly used as locking device on medical carts (see also our 724VR medical cart/ file cabinet lock for use on medical carts)

Body: Zinc die cast

Cylinder: Zinc die cast pin tumbler, drilled for 7 pins Standard function: Key removable in locked or unlocked position.

Key retaining function: Alternate key-retaining shifters (page 63) are available separately for key removable in locked position only.

Cams: 2 reversible cams work in all positions

Finish: 26D

Packaged: Packed 10 per box

KEYING INFORMATION

Keyways: A,B,E,F,G,J,K,L,R Keys: Includes 2 keys per lock Stock keying: O-Bit

Keying: Custom and/or masterkeying available.

Specify at time of order.

Rekeying: Use special pin spring p/n S-SPRING.

INCLUDED ACCESSORIES

Trim collar and parts in chart below.

OPTIONAL ACCESSORIES

See pages 74-75 for a complete list of optional cam sizes and other accessories for use with B7 Series cam locks.

