R Series


DCR Cam Lock



Item	Finish	Cyl. Length	h Keying				
DCR1	26D, US3	1-1/16"	KD, KA 4T21579, 4T37526 Custom Keyed				
DCR2	26D, US3	1-3/16"					
DCR3	26D, US3	1-7/16"					
DCR4	26D, US3	1-3/4"					
Cylinder length: As measured with straight cam.							

DIMENSIONS

	For Mat. Thickness	Straight Cam (X)	Inbent Cam (Y)	Outbent Cam (Z)	Cylinder Length (A)
DCR1	3/4"	1-1/16"	3/4"	1-3/8"	1"
DCR2	7/8"	1-3/16"	7/8"	1-1/2"	1-1/8"
DCR3	1-1/8"	1-7/16"	1-1/8"	1-3/4"	1-3/8"
DCR4	1-1/2"	1-13/16"	1-1/2"	2-1/8"	1-3/4"



5/8

3/4

Key together with other R Series locks

SPECIFICATIONS

- Keying: Can be keyed together with other **R** Series locks
- Rekeyable: Easily rekeyable via cylinder retainer clip
- ANSI/BHMA: Passed ANSI/BHMA A156.11 Grade 1 performance requirements. Equivalent to E07261 / E07271.
- US Patent Nos: 5,038,589; 5,737,950
- Body: Zinc die cast
- Cylinder: Zinc die cast, pin tumbler
- Standard function: Key removable in locked or unlocked position.
- Key retaining function: Alternate key-retaining shifters (page 62) are available separately for key removable in locked position only.
- Cams: 2 reversible cams work in all positions
- Face: 1" face covers splintering, no additional trim ring required
- Finish: 26D or US3 Packaged: Packed 10 per box

KEYING INFORMATION


Keyway: R Series (equivalent to CCL R1 system) Keys: Includes 2 keys per lock Stock keying: KD/KA - 5 pin standard Stock KA#: 4T21579, 4T37526 Masterkeyed: 5 pin standard Grand masterkeyed: Available Keyblank 5-pin: KBR-5-NP (equivalent to CO106, 1003A)

INCLUDED ACCESSORIES See below.

OPTIONAL ACCESSORIES

See pages 74-75 for a complete list of optional cam sizes and other accessories for use with DCR cam locks.

DCNP-200-KR: Key retaining drawer cam shifter DCNP-200-KDR: Key retaining door cam shifter

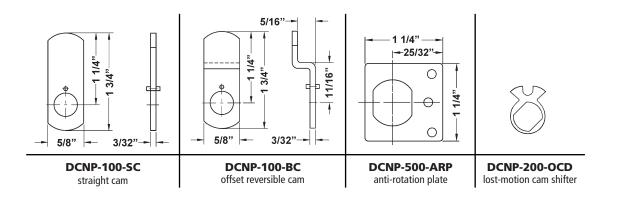

INCLUDED ACCESSORIES



