


Rockwood 2660

2600 Series Door Coordinator

Experience a safer
and more open world

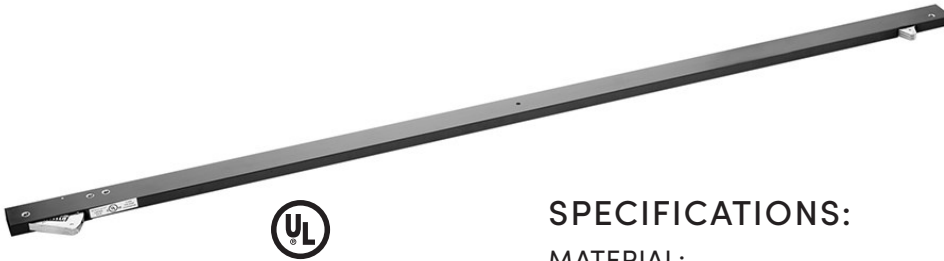

SPECIFICATIONS:

MATERIAL:

Steel

FASTENERS:

7 ea. #12-24 x 1 1/4" Truss Head
Type C Tapping Screws

FEATURES:

- Non-handed. Override protection to prevent damage in case of abnormal force on door. Mechanism and filler bar completely fill width of opening and when painted to match frame it becomes virtually invisible.
- Custom Sizes: The 2600 Series coordinators are manufactured in different housing lengths to coordinate the full range of door sizes including:
 - NX2600 Series: For jamb opening widths 48" - 54"; coordinator length 42"
 - 2600 Series: For jamb opening widths 54" - 96"; coordinator length 52".

DETERMINING COORDINATOR ITEM NUMBER:

- Active door widths plus Inactive door width equals the last two or three digits of all 2600 Series coordinator item number (2680 is for 80" door openings).
- Less than 48" jamb widths - N2600 Series (N2644 = 44" opening).
- Larger sizes are available (XL, XXL), contact the factory.

OPTIONS:

Specify make and model of exit device for vertical rod preparation.

NOTES:

- Some panic hardware requires the coordinator to be factory prepped (Contact factory).
- Contact the factory for other available smaller or larger sizes.

AVAILABLE FINISHES:

- Black
- US28/628

Size:

$\frac{5}{8}$ " x $1 \frac{5}{8}$ " x 52"

Opening: 60"

Weight: 7.0 lbs.

ANSI A156.3: Type 21A

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Copyright © 2019-2022, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.