CL100 ADA LaviLock

The **CL100 ADA LaviLock** is a disabled access lockset designed with ease of use and longevity of service in mind. Brass and stainless steel working components ensure reliability.

The LaviLock is selflatching and utilizes 'fail safe' single action egress functionality.

The Indicator Lock is supplied as a complete set including CL100 Mortise Lock Case, Lever Handles, Stainless Steel Indication Plates and Slide Locking Buttons including Emergency Release.





'Vacant/In Use' indicator plate with Emergency Release on outside door face.



Easy to use 'Unlock/Lock' lever on inside door face.




CaviLock CL100 LaviLock in Satin Chrome fitted to door mounted on CS WallMount Track



Quality Sliding Door Hardware



Dimensions

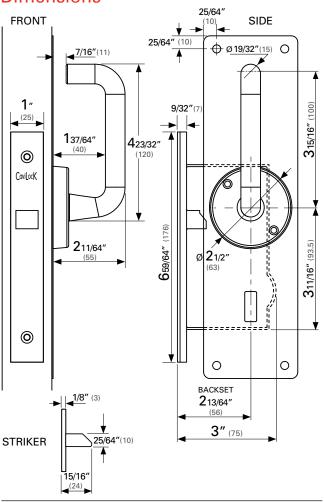

Construction

Case:	Die cast Zinc
Internal Parts:	Bronze/Brass
Screws, springs etc:	Stainless Steel
Faceplate & striker:	Brushed Stainless Steel

Finish Options & Configurations

Available in Satin Chrome. The CL100 ADA LaviLock is handed. Please check the Handing diagram above before ordering.

CL100B3008	ADA LaviLock - Right Hand
CL100B3010	ADA LaviLock - Left Hand

If LaviLock is to be installed into areas where there is exposure to corrosive environments, e.g. high chlorine or salt concentration, contact us for an appropriate solution.

Drawings & pictures are not to scale. All dimensions in inches (and mm).

www.cavitysliders.com

High quality products designed in New Zealand


- **T** (888) 466 0030 **F** (310) 769 5824
- E info@cavitysliders.com


In line with ADA Standards for Accessible Design, the CL100 Lavilock has a lever that is easy to grasp with one hand and does not require tight grasping, tight pinching or twisting of the wrist. The opening force required to operate the unit is less than 5lbf (22.2N), which is under the threshold for ADA compliance.

IMPORTANT: Operable parts of hardware must be mounted 34" (865mm) min. and 48" (1220 mm) max. above finished floor to meet ADA guidelines. The clear width of the door opening must be a minimum of 32". Always check State and Federal guidelines relating to the specific project.

Handing

The CL100 Lavilock is handed and handing must be specified at time of order.





When standing looking into the pocket, if the locking snib is on your *left hand* side then the **LaviLock** is a Left Hand lock.

When standing looking into the pocket, if the locking snib is on your *right hand* side then the **LaviLock** is a Right Hand lock.

EF = Egress Free - Even when in locked position the handle on the **inside** remains unlocked.

CL100 Mortise Lock Features

The **CL100 Mortise Lock** is a versatile mortise that has many different internal and external hardware options. The internal components have been built to resist corrosion, making it suitable for both internal and external use in commercial, architectural and residential applications.



Cavity Sliders USA Inc.

548 Finney Ct

Gardena

CA 90248

- Slimline mortise is compatible with doors 1-3/8" or thicker.
- Suitable for pocket doors and surface sliding doors
- Easy to operate
- Corrosion resistant
- For use with timber or aluminum doors

Another quality product from:

